



2019 PRODUCT CATALOG

**It all
starts
with
WATER!**



To expand our Save Water | Give Life social cause, Weathermatic is donating a specific number of gallons of clean water for each product purchased through our Products with Purpose campaign.

**PRODUCTS
WITH
PURPOSE**





It all starts with WATER!

Our lives, our communities, and our industry's future relies on our most fundamental element: water. At Weathermatic, **we're passionate about helping you save water in the landscape**, where water is wasted the most. Using proven irrigation science and market-leading technology, our solutions help maximize landscape beauty while saving billions of gallons of water. We invite you to spend a few moments reviewing our 2019 catalog. We believe you will find our full line of products offer market leading quality and innovation to help you fulfill your irrigation water management needs.

Join Our "Water First" Approach

We are on a mission to change the way you and our industry value water. No longer can we afford for water to be an afterthought or suffer from inferior technology or management practices. By putting water first, **in design, installation, and maintenance**, we help you maximize your water efficiency.

With over 500,000 SmartLine® control systems saving billions of gallons of water around the globe, we in turn provide billions of gallons of fresh drinking water to underprivileged communities with our Save Water | Give Life program. Now, through adding our **"Products with Purpose"** campaign, we are giving our customers ownership of their impact by designating a specific number of gallons given for every product purchased. You will see details throughout the catalog of the gallons given and the difference you are making by choosing Weathermatic products, from our SmartLine® control systems to pressure regulating MAX spray heads. **Together, we will save billions of gallons of water and thousands of lives. It all starts with WATER!**



Will you join us in bringing safe water to thirsty communities in need?

We found that a year's worth of overwatering from an average commercial property is equivalent to the clean water needed by 200 families in a developing country for drinking, cooking, and sanitation.

This is why we dedicate a portion of our profits to global clean water projects. These contributions bring safe water to thousands of the world's thirsty each year and lasts for generations.

With each purchase through our "Products with Purpose" campaign, you are more than a customer. You are part of a community that is actively saving landscape water and making an investment in people's lives and in our future.



SAVE WATER
GIVE LIFE

TABLE OF CONTENTS



CONTROLLERS



- | | | | |
|----------|-----------------------|-----------|------------------------------|
| 1 | ProLine Controller | 10 | WaterSense Certified Bundles |
| 3 | Rain/Freeze Sensors | 11 | Enclosures |
| 5 | SmartLine® Controller | 12 | Solar Controller |
| 7 | 2-Wire Decoder System | 13 | Battery Powered Controller |
| 9 | Weather Stations | | |

SmartLink®

- | | | | |
|-----------|--------------------------|-----------|-------------------------|
| 14 | SmartLink® Residential | 18 | SmartLink® Bundles |
| 15 | SmartLink® Network | 19 | Flow Sensors |
| 16 | Aircards & Service Plans | 21 | Flow Sensor Accessories |
| 17 | Antennas | | |



VALVES



- | | | | |
|-----------|------------------------|-----------|---------------------|
| 28 | Nitro Valve | 31 | Bronze Bullet Valve |
| 29 | Silver Bullet Valve | 33 | Smart Control Zones |
| 30 | Black Bullet Max Valve | 34 | Valve Accessories |

SPRAYS & NOZZLES

- | | |
|-----------|--------------------------|
| 35 | MAX/MAX-PRS Sprays |
| 37 | MAX MPR Nozzles |
| 39 | MAX AAN Nozzles |
| 41 | B Series Brass Nozzles |
| 43 | 100 Series Shrub Nozzles |
| 44 | Bubblers & Bed Sprays |



ROTORS

- | | |
|-----------|---------------------|
| 45 | T3/T35 Turbo Rotors |
| 47 | CT70 Rotors |





PL1600
4-Zone base model:
Expandable to 24 zones
PL1620
20-Zone fixed zone count

9 1/8" W x 10 1/2" H x 4" D
23.2 cm x 25.7 cm x 10.2 cm



SLM4
4-Zone
Module



SLM12-1600
12-Zone Module



PL800
4-Zone base model:
Expandable to 8 zones

7" W x 7 3/4" H x 1 3/4" D
17.8 cm x 19.7 cm x 4.4 cm



SLM2
2-Zone Module

BASIC FEATURES

- ◆ SmartLink® Aircard Compatible
- ◆ 4 programs: A, B, C; program D can operate concurrently
- ◆ 8 start times per program
- ◆ Indoor/Outdoor Rated
- ◆ English/Spanish
- ◆ Zone run times settable from 1 min. to 9 hrs. 55 min.
- ◆ Rain/Freeze sensing on/off button with Tri-Color LED indicator
- ◆ Rain delay of 1 - 7 days
- ◆ RFS5 Rain/Freeze Sensor rain delay programmable from 0 - 99 hours
- ◆ Seasonal % adjust by program, by month
- ◆ Omit time of day window, day(s) of week, and up to 7 calendar dates
- ◆ Programmable zone-to-zone delay 1 min. - 3 hrs.
- ◆ Watering days: custom days of the week, odd/even, or interval days
- ◆ Run/Soak cycles by program
- ◆ Large backlit LCD display
- ◆ Non-volatile memory - with no battery required
- ◆ Internal 120VAC/230VAC transformer with pre-installed 6' line cord (PL1600, PL1620 only)

Model	Input	Output	Fuse
PL1600	120VAC/60Hz @ 400 mA for 3 valves	28VAC, 1.0A maximum	1.0A, slow blow
PL4800	5 valve		1.5A, slow blow



Switch between English and Spanish with the touch of a button



ProLine® Specifications			
Model	Description (Indoor/Outdoor)	Increase Zone Count	International Model
PL800	4-Zone Base Model (Indoor)	SLM2 - 2 Zone / up to 8 Zones	E-PL800
PL1600	4-Zone Base Model	SLM4 - 4 Zone / up to 16 Zones SLM12-1600 - 12 Zone / up to 24 Zones	E-PL1600
PL1620	20-Zone Fixed Zone Count	N/A	E-PL1620
PL4800	12-Zone Base Model	SLM12-4800 - 12 Zone / up to 48 Zones	E-PL4800

230VAC/50Hz

MANUAL OPERATION

- ◆ Manual test runs each zone with zone run times from 10 sec. – 10 min.
- ◆ Manual zone operation of a single zone (1 min. to 9 hrs. 55 min.)
- ◆ Push button manual start of a program from control panel

ON-SITE DIAGNOSTIC/TROUBLESHOOTING FEATURES

- ◆ Fault review displays all faults, including open and shorted zones
- ◆ Test function using on-board multi-meter
- ◆ Built-in valve locator
- ◆ Backtrack Stored Program™

ADDITIONAL FEATURES

- ◆ Zone-to-zone delay
- ◆ Master valve timing sequence with zone valve programmable
- ◆ Master valve/pump start operation assignable On/Off by zone
- ◆ Clear program function
- ◆ Clear All function
- ◆ Grow-In Program
- ◆ Upgradable to SmartLink® Web-based Access



PL4800

12-Zone base model:
Expandable to 48 zones

15" W x 16 1/2" H x 5 7/16" D
38.1 cm x 41.9 cm x 13.8 cm




SLM12-4800
12-Zone Module



Beautify landscapes while saving water and money.

With SmartLink®, you have the power to control your irrigation system anywhere, anytime!

Easily connect your irrigation system to the internet using SmartLink® Aircard.

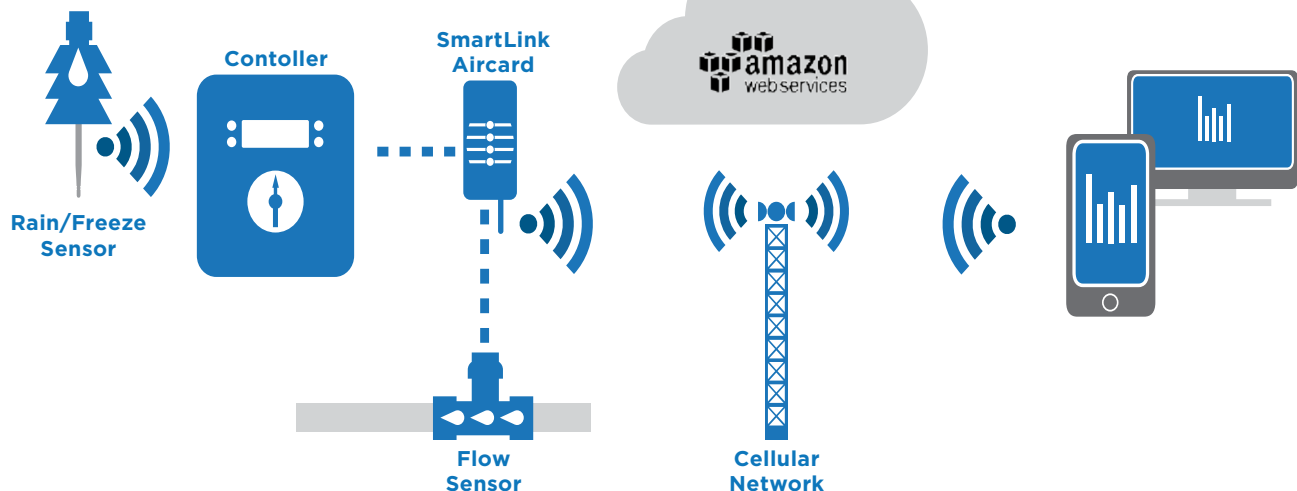

SmartLink®
COMPATIBLE

RFS5



Rain/Freeze Sensor Specification	
Model	Description
RFS5	Wireless Rain/Freeze Sensor 900 mhz - 1500' Line of Site Range

FEATURES

- ◆ Compatible with both ProLine® and SmartLine® controllers
- ◆ Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- ◆ Extended rain delay adds time to rain events before deficits begin to accumulate
- ◆ Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- ◆ On-board diagnostics indicate battery and communication status
- ◆ Remote battery strength measurement from the SmartLine® or ProLine® controller
- ◆ 10-Year battery life
- ◆ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ◆ Operates on 900MHz frequency for superior range and reliability
- ◆ Maximum wireless distance from controller to weather station is 1500' (457 m) line of site. SLHUB-RF-5 wireless hub included with SLW5
- ◆ Freeze shut-off activated at 37°F (3.0°C)



RFS1



Rain/Freeze Sensor Specification	
Model	Description
RFS1	Wired Rain/Freeze Sensor

FEATURES

- ◆ Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- ◆ Extended rain delay adds time to rain events before deficits begin to accumulate
- ◆ Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- ◆ On-board diagnostics indicate battery and communication status
- ◆ Remote battery strength measurement from the SmartLine® controller
- ◆ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ◆ Wired directly to the SmartLine® controller via the 35 feet of included cable
- ◆ Freeze shut-off activated at 37°F (3.0°C)




FEATURES

- ◆ Rain shut-off settable from 1/8- 1" (3 - 25 mm)
- ◆ Tough UV-Stabilized plastic housing
- ◆ Replaceable absorptive disks
- ◆ No-Rust extruded aluminum bracket - mounts anywhere
- ◆ UL-listed watertight switch provides years of reliable service works with virtually all 24VAC controllers
- ◆ Each unit factory tested
- ◆ 35 feet of cable provided

420LS ADDS:

- ◆ Extra-long 7" aluminum bracket
- ◆ Factory-set freeze thermostat

Sensor Specification	
Model	Description
420GLS	Wired Rain Sensor (35' of cable)
420LS	Wired Rain/Freeze Sensor (35' of cable)

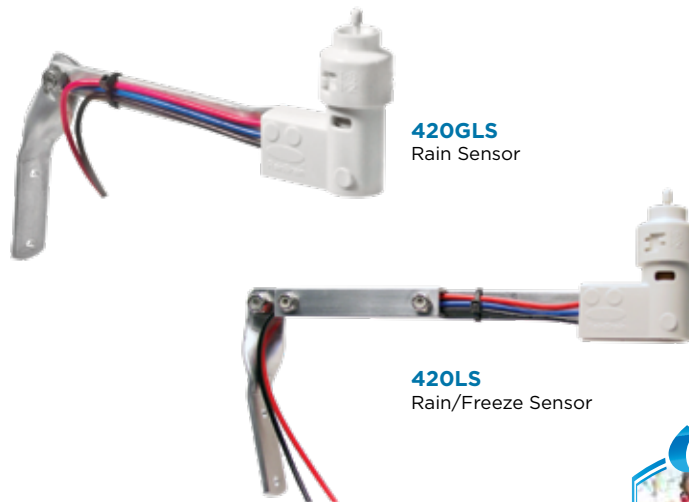

420GLS
Rain Sensor

420LS
Rain/Freeze Sensor



"ProLine is the only controller we install, because of the price and because it's heads above any other controller. Homeowners and contractors love the advanced features, multimeter, and valve locator because they save so much time.

I carry one in my truck to troubleshoot customers' irrigation systems. I take their clock off, put the ProLine on, and it tells me what's wrong with their system rather than having to guess. Most of the time they buy the ProLine from me right there. It sells itself."

Rocky Hatch, Owner
Antelope Sprinkler Systems



SmartLine®

The Smart Irrigation Controller



SL1600
4-Zone base model:
Expandable to 24 zones
SL1620
20-Zone fixed zone count

9 1/8" W x 10 1/2" H x 4" D
23.2 cm x 25.7 cm x 10.2 cm



SLM4
4-Zone
Module



SLM12-1600
12-Zone Module



SL800
4-Zone base model:
Expandable to 8 zones

7" W x 7 3/4" H x 1 3/4" D
17.8 cm x 19.7 cm x 4.4 cm



SLM2
2-Zone Module

BASIC FEATURES

- ◆ SmartLink® Aircard Compatible
- ◆ 4 independent programs - each stacks or can operate simultaneously
- ◆ 8 start times per program
- ◆ Indoor/Outdoor Rated
- ◆ Zone run times settable from 1 min. to 9 hrs. 55 min.
- ◆ Rain/Freeze sensing on/off button with Tri-Color LED indicator
- ◆ Rain delay of 1 - 7 days
- ◆ SLW5/SLW1 Weather Station rain delay programmable from 0 - 99 hours
- ◆ Seasonal % adjust by program, by month
- ◆ Omit time of day window, day(s) of week, and up to 7 calendar dates
- ◆ Programmable zone-to-zone delay 1 min. - 3 hrs.
- ◆ Watering days: custom days of the week, odd/even, or interval days
- ◆ Run/Soak cycles by program
- ◆ Large backlit LCD display
- ◆ Non-volatile memory - with no battery required
- ◆ Internal 120VAC/230VAC transformer with pre-installed 6' line cord (SL1600, SL1620 only)
- ◆ 2 Watering modes: Basic Mode and Smart Mode
- ◆ Basic Mode: User Controlled Conventional Operation
- ◆ Smart Mode: Daily automatic programming adjustments
- ◆ 5 user-selectable languages

Model	Input	Output	Fuse
SL1600	120VAC/60Hz @ 400 mA for 3 valves	28VAC, 1.0A maximum	1.0A, slow blow
SL4800	5 valve		1.5A, slow blow



SmartLine® Specifications			International Model
Model	Description (Indoor/Outdoor)	Increase Zone Count	
SL800	4-Zone Base Model (Indoor)	SLM2 - 2 Zone / up to 8 Zones	E-SL800
SL1600	4-Zone Base Model	SLM4 - 4 Zone / up to 16 Zones SLM12-1600 - 12 Zone / up to 24 Zones	E-SL1600
SL1620	20-Zone Fixed Zone Count	N/A	E-SL1620
SL4800	12-Zone Base Model	SLM12-4800 - 12 Zone / up to 48 Zones	E-SL4800

SMART WATERING FEATURES

- ◆ ZIP Code input or Latitude input
- ◆ Sprinkler type input
- ◆ Plant type input
- ◆ Soil type input
- ◆ More/Less ET Tuning
- ◆ Watering run times
- ◆ Review menu displays accumulated ET deficits by zone
- ◆ Display maximum run time and minimum soak time
- ◆ Displays temperature readings (daily high/low) for previous 5 days
- ◆ Accumulates total run times by zone from the last reset date
- ◆ Clear deficits for all zones
- ◆ Extended rain delay programmable from 0 – 99 hours

MANUAL OPERATION

- ◆ Manual test runs each zone with zone run times from 10 sec. – 10 min.
- ◆ Manual zone operation of a single zone (1 min. to 9 hrs. 55 min.)
- ◆ Push button manual start of a program from control panel

ON-SITE DIAGNOSTIC/TROUBLESHOOTING FEATURES

- ◆ Fault review displays all faults, including open and shorted zones
- ◆ Test function using on-board multi-meter
- ◆ Built-in valve locator
- ◆ Backtrack Stored Program™

ADDITIONAL FEATURES

- ◆ Zone-to-zone delay
- ◆ Master valve timing sequence with zone valve programmable
- ◆ Master valve/pump start operation assignable On/Off by zone
- ◆ Clear program function
- ◆ Clear All function
- ◆ Grow-In Program
- ◆ Upgradable to SmartLink® Web-based Access
- ◆ Two independently programmed master valves
- ◆ Normally open or normally closed master valve operation
- ◆ Flow sensor data review (requires SmartLink aircard)
- ◆ Real time flow display (requires SmartLink aircard)



SL4800

12-Zone base model:
Expandable to 48 zones

15" W x 16 1/2" H x 5 7/16" D
38.1 cm x 41.9 cm x 13.8 cm



SLM12-4800

12-Zone Module



SmartWire

2-Wire Decoder System

BASIC FEATURES

- ◆ SmartLink® Aircard compatible
- ◆ 4 independent programs - each program stacks or can operate simultaneously
- ◆ 8 start times per program
- ◆ Zone run times settable from 1 min. to 9 hrs. 55 min.
- ◆ Rain/Freeze sensing on/off button with Tri-Color LED indicator
- ◆ Rain delay of 1 - 7 days
- ◆ SLW5/SLW1 Weather Station rain delay programmable from 0 - 99 hours
- ◆ Seasonal % adjust by program, by month
- ◆ Omit time of day window, day(s) of week, and up to 7 calendar dates
- ◆ Programmable zone-to-zone delay 1 min. - 3 hrs.
- ◆ Watering days: custom days of the week, odd/even, or interval days
- ◆ Run/Soak cycles by program
- ◆ Large backlit LCD display
- ◆ Non-volatile memory - with no battery required
- ◆ Internal 120VAC/230VAC transformer with pre-installed 6' line cord
- ◆ 2 Watering modes: Basic Mode and Smart Mode
- ◆ Basic Mode: User Controlled Conventional Operation
- ◆ Smart Mode: Daily automatic programming adjustments
- ◆ 5 user-selectable languages

SMART FEATURES

- ◆ ZIP Code input or Latitude input
- ◆ Sprinkler type input
- ◆ More/Less ET Tuning
- ◆ Review menu displays accumulated ET deficits by zone
- ◆ Displays maximum run time and minimum soak time
- ◆ Displays temperature readings (daily high/low) for previous 5 days
- ◆ Accumulates total run times by zone from the last reset date
- ◆ Clear deficits for all zones
- ◆ Extended rain delay programmable from 0 - 99 hours



SmartWire® 2-Wire Specification		
Model	Description	International Model
SL9648TW	SmartWire 48 - Zone 2-Wire Fixed Zone Count	E-SL9648TW
SL9696TW	SmartWire 96 - Zone 2-Wire Fixed Zone Count	E-SL9696TW

MANUAL OPERATION

- ◆ Manual test runs each zone with zone run times from 10 sec. - 10 min.
- ◆ Manual zone operation of a single zone (1 min. to 9 hrs. 55 min.)
- ◆ Push button manual start of a program from control panel

ON-SITE DIAGNOSTIC/TROUBLESHOOTING FEATURES

- ◆ Fault review displays all faults, including open and shorted zones
- ◆ Test function using on-board multi-meter
- ◆ Built-in valve locator
- ◆ Backtrack Stored Program™

ADDITIONAL FEATURES

- ◆ Zone-to-zone delay
- ◆ Two independently programmed master valves
- ◆ Normally open or normally closed master valve operation
- ◆ Master valve timing sequence with zone valve programmable
- ◆ Master valve/pump start operation assignable On/Off by zone
- ◆ Clear program function
- ◆ Clear All function
- ◆ Grow-In Program
- ◆ Flow sensor data review
- ◆ Upgradable to SmartLink® Web-based Access
- ◆ Real time flow display (requires SmartLink aircard)

DECODER MODULE FEATURES

- Compatible with SmartLink™
- Connections for up to 3 different 2-Wire paths for maximum installation flexibility
- LED display and status lights for programming, operation status, and troubleshooting with error codes
- Programs and operates SmartWire™ SLDEC Series decoders

DECODER FEATURES

- 1, 2, and 4 valve decoders available
- Decodes signals from Decoder Module to open and close valves
- Input voltage 24 - 28VAC from 2-Wire path
- Shock resistant
- Surge protection
- Fully programmable for valve addresses using Decoder Module
- Freeze/heat resistant (-20° to 60°C)
- 14 gauge PVC-coated connecting wires
- Sealed electrical components for protection from water and dirt
- Operates valves to a maximum of 100' (30m) from decoder
- Diagnoses and reports failed solenoids to the Decoder Module
- Auto shut-down if communication with Decoder Module is lost

WARRANTY

- 3 Years - SmartWire when used with SLWIRE, SLCONN connectors
- 2 Years - SmartWire when used without SLWIRE



SLDEC



SLCONN



SLGDT

SmartWire® 2-Wire Specification

Model	Description
SLDEC1	1-Valve Decoder
SLDEC2	2-Valve Decoder
SLDEC4	4-Valve Decoder
SLGDT	Lightning Arrestor
SLCONN	SmartWire Splice Kit
SLCAM	SmartWire Clamp-On Amp Meter

Wiring Sizes

Straight line configuration, i.e. wire distance to the furthest decoder, no loop:

Wire Size (Gauge)	#18	#16	#14	#12
Wire Length (ft)	1,000	2,000	4,000	6,000
Wire Length (m)	305	610	1,210	1,829

Loop configuration, i.e. wire distance to the furthest decoder in the loop:

Wire Size (Gauge)	#18	#16	#14	#12
Wire Length (ft)	2,000	4,000	10,000	10,000
Wire Length (m)	610	1,210	3,048	3,048


Maximum total wire path length is 10,000 ft. (3,048 m).



SL9600TW

HOW IT WORKS

A SmartWire SLDEC valve decoder is wired to each valve. Each decoder has a programmable address (typically the zone number), which identifies it to the SmartWire SL9600TW controller.

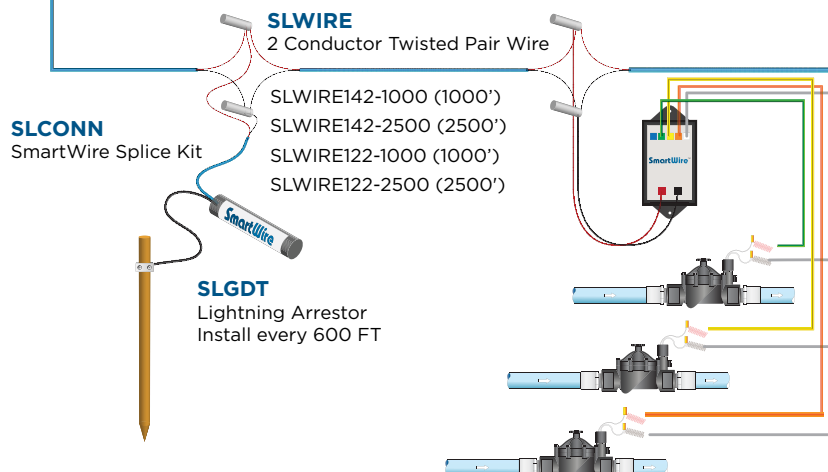

SLDEC

Valve Decoder

The SL9600TW 2-Wire decoder module broadcasts a command to activate a certain address or zone. All decoders on a 2-Wire path "decode" the message, but only the appropriate decoder responds and turns the attached valve on or off. The decoder reports back to the decoder module with a status message of positive operation or an error code.



SLW5



SLW5
Wireless Weather Station

SLHUB-RF-5
Wireless Receiver
(included)

SLW5 Weather Station Specification

Model	Description
SLW5	Wireless Weather Station for ET Based Watering * 900mhz - 1500' Line of site range



FEATURES

- ◆ Microprocessor records and processes weather data for use in establishing "Smart" Auto Adjust run times on any SmartLine® controller
- ◆ Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- ◆ Extended rain delay adds time to rain events before deficits begin to accumulate
- ◆ Rain events decrement current deficits in the SmartLine® controller
- ◆ Freeze shut-off activated at 37°F (3.0°C)
- ◆ Protective white solar shields allow normal air flow while protecting sensor from direct sunlight for accurate temperature readings and eliminating the need for regular cleaning and maintenance of the weather station
- ◆ Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- ◆ Maximum wireless distance from controller to weather station is 1500' (457 m) line of site. SLHUB-RF-5 wireless hub included with SLW5
- ◆ On-board diagnostics indicate battery and communication status
- ◆ Remote battery strength measurement from the SmartLine® controller
- ◆ 10-Year battery life
- ◆ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ◆ Operates on 900MHz frequency for superior range and reliability



SLW1



SLW1
Wired Weather Station

SLW1 Weather Station Specification

Model	Description
SLW1	Wired Weather Station for ET Based Watering * 35ft of cable provided



FEATURES

- ◆ Microprocessor records and processes weather data for use in establishing "Smart" Auto Adjust run times on any SmartLine® controller
- ◆ Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- ◆ Extended rain delay adds time to rain events before deficits begin to accumulate
- ◆ Rain events decrement current deficits in the SmartLine® controller
- ◆ Freeze shut-off activated at 37°F (3.0°C)
- ◆ Protective white solar shields allow normal air flow while protecting sensor from direct sunlight for accurate temperature readings and eliminating the need for regular cleaning and maintenance of the weather station
- ◆ Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- ◆ On-board diagnostics indicate battery and communication status
- ◆ Remote battery strength measurement from the SmartLine® controller
- ◆ Adjustable arm metal bracket for gutter thumb-screw or wall mount
- ◆ Wired directly to the SmartLine® controller via the 35 feet of included cable



MORE POWERFUL, MORE AFFORDABLE, MORE EFFICIENT. IT'S JUST SMARTER.

Our diehard fans love that the SmartLine® feature set exceeds that of most high-end controllers, yet was engineered to make ET-based water management affordable for any size project. Our WaterSense-labeled SmartLine® controller and weather station bundle is independently certified to be 20% more water efficient than similar products on the market. Over 500,000 SmartLine® controllers installed world-wide are saving millions of gallons of water every year.



SL800 with Weather Station



SL800 Controller with SLW1

SL800 Controller with SLW5

Model	Description
SL804-SLW1	SL800, 4 zones, with SLW1 Wired Weather Station
SL806-SLW1	SL800, 6 zones, with SLW1 Wired Weather Station
SL808-SLW1	SL800, 8 zones, with SLW1 Wired Weather Station
SL804-SLW5	SL800, 4 zones, with SLW5 Wireless Weather Station
SL806-SLW5	SL800, 6 zones, with SLW5 Wireless Weather Station
SL808-SLW5	SL800, 8 zones, with SLW5 Wireless Weather Station

SL4800 with Weather Station



SL4800 Controller with SLW1

SL4800 Controller with SLW5

Model	Description
SL4812-SLW1	SL4800, 12 zones, with SLW1 Wired Weather Station
SL4824-SLW1	SL4800, 24 zones, with SLW1 Wired Weather Station
SL4836-SLW1	SL4800, 36 zones, with SLW1 Wired Weather Station
SL4848-SLW1	SL4800, 48 zones, with SLW1 Wired Weather Station
SL4812-SLW5	SL4800, 12 zones, with SLW5 Wireless Weather Station
SL4824-SLW5	SL4800, 24 zones, with SLW5 Wireless Weather Station
SL4836-SLW5	SL4800, 36 zones, with SLW5 Wireless Weather Station
SL4848-SLW5	SL4800, 48 zones, with SLW5 Wireless Weather Station

SL1600 Series with Weather Station



SL1600/SL1620/SL1624 Controller with SLW1

SL1600/SL1620/SL1624 Controller with SLW5

Model	Description
SL1604-SLW1	SL1600, 4 zones, with SLW1 Wired Weather Station
SL1608-SLW1	SL1600, 8 zones, with SLW1 Wired Weather Station
SL1612-SLW1	SL1600, 12 zones, with SLW1 Wired Weather Station
SL1616-SLW1	SL1600, 16 zones, with SLW1 Wired Weather Station
SL1620-SLW1	SL1620, 20 zones, with SLW1 Wired Weather Station
SL1624-SLW1	SL1624, 24 zones, with SLW1 Wired Weather Station
SL1604-SLW5	SL1600, 4 zones, with SLW5 Wireless Weather Station
SL1608-SLW5	SL1600, 8 zones, with SLW5 Wireless Weather Station
SL1612-SLW5	SL1600, 12 zones, with SLW5 Wireless Weather Station
SL1616-SLW5	SL1600, 16 zones, with SLW5 Wireless Weather Station
SL1620-SLW5	SL1620, 20 zones, with SLW5 Wireless Weather Station
SL1624-SLW5	SL1624, 24 zones, with SLW5 Wireless Weather Station

SL9600 with Weather Station



SL9600 Controller with SLW5

Model	Description
SL9648TW-SLW1	SL9648TW, 48 Zones, with SLW1 Wired Weather Station
SL9648TW-SLW5	SL9648TW, 48 Zones, with SLW5 Wireless Weather Station
SL9696TW-SLW1	SL9696TW, 96 Zones, with SLW1 Wired Weather Station
SL9696TW-SLW5	SL9696TW, 96 Zones, with SLW5 Wireless Weather Station

Enclosures

SLPED-ENC

- ◆ Fits all SL1600 Series, SL4800 and SL9600TW controllers
- ◆ 16 gauge stainless steel construction with brushed finish
- ◆ Pedestal mount model
- ◆ Filtered louvers for ventilation
- ◆ Cam style keylock
- ◆ Weather-resistant
- ◆ NEMA TYPE 3R rated with SmartLine® controller installed

SLPED-ENC-M/SS-1600

13 1/4" W x 44 1/4" H x 6 1/4" D
(33.66 cm x 112.40 cm x 15.88 cm)

SLPED-ENC-M/SS-4800

19 1/2" W x 44 1/4" H x 7 3/4" D
(49.53 cm x 112.40 cm x 19.69 cm)

SLPED-ENC-SS



SLPED-ENC-M



SmartLine® Enclosures Specification

Model	Description
SLPED-ENC-SS-4800	Stainless Steel Enclosure with Pedestal for PL4800/SL4800/SL9600TW
SLPED-ENC-M-4800	Powder-coated Metal Enclosure with Pedestal for Stainless Steel Enclosure with Pedestal for PL4800/SL4800/SL9600TW
SLPED-ENC-SS-1600	Stainless Steel Enclosure with Pedestal for PL1600/SL1600
SLPED-ENC-M-1600	Powder-coated Metal Enclosure with Pedestal for PL1600/SL1600

SLWM

- ◆ Fits all SL1600 Series, SL4800 and SL9600TW controllers
- ◆ 16 gauge stainless steel construction with brushed finish
- ◆ Wall mount model
- ◆ Cam style keylock
- ◆ Weather-resistant
- ◆ NEMA TYPE 3R rated with SmartLine® controller installed

SLWM-M/SS-1600

13 1/4" W x 14 1/4" H x 6 1/4" D
(33.66 cm x 36.20 cm x 15.88 cm)

SLWM-M/SS-4800

19 1/2" W x 19 1/2" H x 7 3/4" D
(49.53 cm x 49.53 cm x 19.69 cm)

SLPED

- ◆ Fits all SL1600 Series, SL4800 and SL9600TW controllers
- ◆ 16 gauge stainless steel construction with brushed finish
- ◆ Pedestal mount model
- ◆ Cam style keylock
- ◆ Weather-resistant
- ◆ NEMA TYPE 3R rated with SmartLine® controller installed

SLPED-1600/4800

10 1/2" W x 25" H x 3 1/2" D
(26.67 cm x 63.50 cm x 8.89 cm)



SLPED-1600

SmartLine® Enclosures Specification

Model	Description
SLWM-SS-4800	Stainless Steel Wall Mount Cabinet for PL4800/SL4800/SL9600TW
SLWM-M-4800	Powder-coated Metal Wall Mount Cabinet for PL4800/SL4800/SL9600TW
SLWM-SS-1600	Stainless Steel Wall Mount Cabinet for PL1600/PL1620/SL1600/SL1620
SLWM-M-1600	Metal Wall Mount Enclosure for PL1600/PL1620/SL1600/SL1620
SLPED-1600	Stainless Steel Pedestal for the PL1600/PL1620/SL1600/SL1620
SLPED-4800	Stainless Steel Pedestal for the PL4800/SL4800/SL9600TW



SLWM-SS-4800



SLWM-SS-1600



SLWM-M-4800



SLWM-M-1600

Water, Power, and Wire Savings

The SmartLine[®] Solar irrigation control system features the industry's first hybrid solar to AC power supply, allowing the SmartLine[®] weather based irrigation control system to operate in locations with no power. SmartLine[®] Solar uses proven SmartLine[®] controllers and industry standard 24VAC valves for greatly enhanced operational life and reduced equipment cost.

FEATURES

- ◆ SmartLink[®] Aircard compatible
- ◆ Converts SmartLine[®] to a totally "portable" water management system by using proven solar technology
- ◆ SmartLine[®] is a SWAT tested ET system
- ◆ Green power source using 100% renewable energy
- ◆ Easy installation for both Conventional and 2-Wire systems
- ◆ SmartLine[®] Solar uses industry standard 24VAC valves, which out perform debris-prone latching solenoids required with battery operated systems
- ◆ System Diagnostics include Volt meter, Amp meter and Valve Locator
- ◆ 2-Wire SmartWire compatible
- ◆ LCD display indicates battery and solar power condition
- ◆ Dual deep cycle batteries provide up to 7 days of operation with no solar charge
- ◆ State of the art Solar Charge Technology (SCT) prolongs battery life and protects batteries from over charge and assures a full charge
- ◆ Using standard AC power components makes for easy conversion from solar to grid power and allows early stage construction of landscape in new construction projects

SmartLink[®]
COMPATIBLE



SLSOLAR48

SmartLine[®] Solar Specifications

Model	Description
SLSOLAR48	SmartLine [®] Solar System, 48 Zones
SLSOLAR48TW	SmartLine [®] Solar System, 48 Zones 2-Wire
SLSOLAR96TW	SmartLine [®] Solar System, 96 Zones 2-Wire



SmartLine®

The Smart Irrigation Controller

SmartLine® SL4800CHARGE is the industry's first battery-powered, cloud-based smart irrigation controller. SL4800CHARGE has the same rich, user-friendly features as the market leading SmartLine® controller, but when power is lost the SL4800CHARGE continues to work. It seamlessly switches between AC power mode and Battery power mode. SL4800CHARGE can take advantage of electricity when available through battery storage and automatically switch to battery backup when power is lost. This solution saves thousands of dollars otherwise required to run dedicated power for irrigation by taking advantage of the existing power supply on timers for lights and other temporarily powered devices, without sacrificing the intelligence of weather based scheduling and cloud connectivity.

FEATURES

- ◆ SmartLink® Aircard compatible
- ◆ Solves temporary power supply issues in median applications for HOAs and cities, school districts and DOT irrigation systems
- ◆ 7 days of reserve power for service or anytime watering requirements
- ◆ On-site diagnostics on power system
- ◆ 10-year battery life
- ◆ On-site ET wireless weather station
- ◆ Cloud based operation
- ◆ Email alerts for system issues: no power, shorted wires and programming issues
- ◆ Automatic Daylight Savings Time
- ◆ 10-year calendar for compliance
- ◆ Omit times, days, and dates for water restrictions
- ◆ Non-volatile memory
- ◆ No controller panel battery required for program memory
- ◆ 2-year warranty including lighting coverage

SmartLine® Solar Specifications	
Model	Description
SL4800CHARGE	Battery Powered 48 Zone Controller with Built-In Charge System



SMARTLINK® RESIDENTIAL

11

-

- Install and activate using built-in QR code reader
- Equipment bundles include:
 - » ProLine controller, or SmartLine® controller with SLW5 wireless weather station (additional modules sold separately)
 - » SmartLink® Residential Aircard
- No cost annual service plan renewal (2 users included)**

How it works

Access, control and program your system from any mobile device!

* Remote access to controller requires smart phone or tablet capable of operating the mobile SmartLink® app. PC or web based access is not available.

10,000
gallons given
per bundle
PRODUCTS
WITH
PURPOSE

AFFORDABLE, WEB-BASED IRRIGATION MANAGEMENT

Professional Features

- Unlimited accounts
- Assignable account privileges
- Unlimited sites
- Unlimited controllers
- Web browser accessible
- Map integration
- Search Filters
- Asset Tagging
- Single page controller overview
- Manual Zone/Program operation
- Recent Event list (export to .xlsx)
- Valve locator
- Basic programming (mirror SmartLine/ProLine features)
- Advanced "Smart" programming (mirror SmartLine features)
- Seasonal Adjust by month/program
- Omit Days & Times
- Snapshot stored program
- Historical water use reports
- Historical temperature overlays
- Total gallons used per site/controller/zone
- Daily or Monthly summary
- Cellular Communication



Inspection Reporting

- Tablet optimized
- Manually operate zones from within application
- Identify then record valve status
- Identify then record zone specific problems
- Record estimated cost of repairs
- Save images for each zone
- Notes can be made globally and per zone
- Export reports to PDF, XLSX, or XLS

Requirements

- SmartLine or ProLine controller (Firmware 3.10) with SmartLink Aircard installed.
- Yearly service plan fee

Flow Monitoring

- Real water use reporting
- Virtual flow reporting when using standard Aircard
- Set low/high flow threshold
- Email alerts with low/high threshold is crossed
- Mainline and/or Zone automatic shut-down when low/high threshold is crossed
- Automatically learns each zone's gpm (running avg./current avg.)
- (Flow Aircard/Sensor Required)

Service plan includes extended warranty covering lightning, theft and physical damage.



Simple User Interface




Intuitive Reporting



Inspection Reporting

HOW IT WORKS

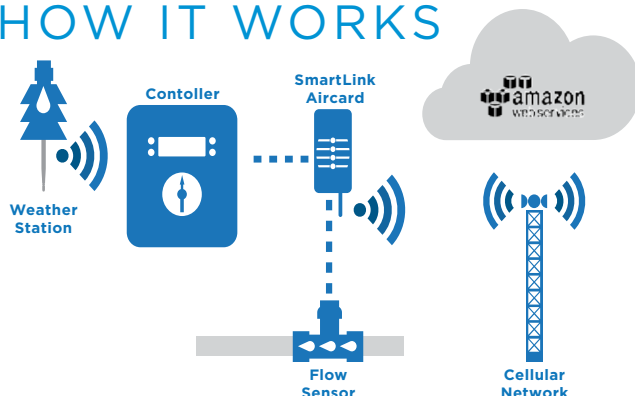

AIRCARDS

FEATURES

- ◆ Connects the SmartLine® or ProLine® controller to the SmartLink®™ web application
- ◆ Provides Web-Based control from a computer, tablet, or smartphone
- ◆ Simple to install
- ◆ Set-up in minutes
- ◆ Automatic firmware updates
- ◆ Status LED
- ◆ Gold plated antenna connection
- ◆ Cellular-Based communication
- ◆ Indoor/Outdoor use

FLOW AIRCARD FEATURES

- ◆ Adds Flow capabilities
- ◆ Flow Sensor connects directly to unit and not the SmartLine® controller



Aircard for Cellular Network	
Model	Description
SL-AIRCARD-ATT	SmartLink® Aircard for ATT Cellular Network
SL-AIRCARDFLOW-ATT	SmartLink® Aircard with Flow for ATT Cellular Network
SL-AIRCARD-ATT-EXT	SmartLink® Aircard for ATT Cellular Network with 50ft Extension
SL-AIRCARDFLOW-ATT-EXT	SmartLink® Aircard with Flow for ATT Cellular Network with 50ft Extension

Annual Aircard Plans	
Model	Description
SL-PLAN1W	SmartLink® 1-Year Service Plan with Warranty
SL-PLAN1FW	SmartLink® 1-Year Service Plan plus Flow with Warranty
SL-FLOW1	SmartLink® 1-Year Flow only upgrade

Aircard with SmartLink® 1 Year Service Plan	
Model	Description
SL-AIRCARD1W-ATT-EXT	SmartLink® Aircard with SmartLink® 1-Year Service Plan plus Warranty for ATT Cellular Network with 50ft Extension
SL-AIRCARD1W-ATT	SmartLink® Aircard with SmartLink® 1-Year Service Plan plus Warranty for ATT Cellular Network
SL-AIRCARDFLOW1FW-ATT	SmartLink® Aircard with SmartLink® 1-Year Service Plan with Flow plus Warranty for ATT Cellular Network
SL-AIRCARDFLOW1FW-ATT-EXT	SmartLink® Aircard with SmartLink® 1-Year Service Plan with Flow plus Warranty for ATT Cellular Network with 50ft Extension

International Aircards and Plans	
Model	Description
E-SL-AIRCARD	SmartLink® Aircard for International
E-SL-AIRCARDFLOW	SmartLink® Aircard for International with Flow
E-SL-AIRCARD1	SmartLink® Aircard for International with SmartLink® 1-Year Service Plan
E-SL-AIRCARD1F	SmartLink® Aircard for International with Flow with SmartLink® 1-Year Service Plan

ANTENNAS



SL-HIGHGAIN-ANT
Omni 3dBi Gain Antenna

OMNI 3DBI GAIN ANTENNA

FEATURES

- ◆ Ideal for industrial or other heavy duty applications
- ◆ Peak gain is 3 dBi gain
- ◆ Rugged Stud mount uses 5/8" hole (16 mm)
- ◆ Flexible seal provides watertight use
- ◆ Includes 3 foot or 20 foot cable
- ◆ Includes Ground Plane and mounting with 20 foot cable (Optional for 3 foot cable)
- ◆ Peak Gain: 3 dBi @ 824-960 MHz
- ◆ Case Material: ASA plastic, UV Resistant
- ◆ Dimensions: 1.7" diameter x 3" high (43 mm x 76 mm)

Omni 3dBi Gain Antenna Specification	
Model	Description
SL-HIGHGAIN-ANT-WB-3	3dBi Gain Antenna with 3 foot cable and ground plane
SL-HIGHGAIN-ANT-WOB-3	3dBi Gain Antenna with 3 foot cable
SL-HIGHGAIN-ANT-WB-20	3dBi Gain Antenna with 20 foot cable and ground plane

STANDARD ANTENNA

- ◆ Standard no gain antenna included with SmartLink® Aircard
- ◆ Omni directional
- ◆ Mounts directly on SmartLink® Aircard
- ◆ Suitable for most SmartLink® Aircard locations



SL-ANT
Aircard Standard Antenna

Standard Antenna Specification	
Model	Description
SL-ANT	SmartLink® Aircard Standard Antenna

BLADE 3DBI GAIN ANTENNA

FEATURES

- ◆ Mounts directly on SmartLink® Aircard
- ◆ Peak gain is 3 dBi gain
- ◆ Sleek profile with straight operation
- ◆ Compact design, ground plane independent with high performance
- ◆ Peak Gain: 3 dBi @ 824-894 MHz
- ◆ Dimensions: 7.75" high (20 cm)



SL-BLADE-ANTENNA
Blade 3dBi Gain Antenna

Blade 3dBi Gain Antenna Specification	
Model	Description
SL-BLADE-ANTENNA	Halfwave cellular dual band antenna

SL-CABINET

- ◆ Weatherproof cabinet for mounting and wiring of SmartLink® Aircards and accessories.
- ◆ Dimensions: 9 1/8" W x 10 1/2" H x 4" D
23.2 cm x 25.7 cm x 10.2 cm



SL-CABINET
Weatherproof Mounting Cabinet

BUNDLES

Our custom SmartLink® Bundles makes it easy to find a solution to fit your job. Use the simple to follow chart below to build your bundle. Simply choose a bundle (SmartLine® controller, SLW5 weather station and aircard) to fit the size of your property and add a service plan. Adding the optional flow capability provides even more control over the irrigation system.




SMARTLINK® BUNDLE



SLW5 Weather Station
SmartLine® Controller
SmartLink® Aircard
SmartLink® Service Plan
Total Protection Warranty

SMARTLINK® BUNDLE WITH FLOW

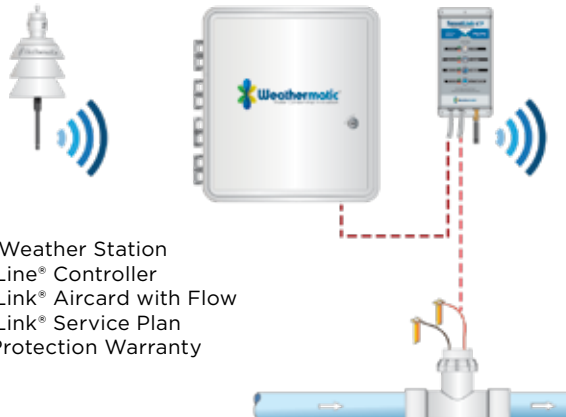

SLW5 Weather Station
SmartLine® Controller
SmartLink® Aircard with Flow
SmartLink® Service Plan
Total Protection Warranty

SmartLink® Bundles with 1 Year Service Plan	
Model	Description
SL1616-1YR-BDL-ATT	SL1616 1 Year Bundle with 16 Zones for ATT Cellular Network
SL1616-1YR-BDL-FLOW-ATT	SL1616 1 Year Bundle with Flow with 16 Zones for ATT Cellular Network
SL4824-1YR-BDL-ATT	SL4824 1 Year Bundle with 24 Zones for ATT Cellular Network
SL4824-1YR-BDL-FLOW-ATT	SL4824 1 Year Bundle with Flow with 24 Zones for ATT Cellular Network
SL4848-1YR-BDL-ATT	SL4824 1 Year Bundle with 48 Zones for ATT Cellular Network
SL4848-1YR-BDL-FLOW-ATT	SL4824 1 Year Bundle with Flow with 48 Zones for ATT Cellular Network

SmartLink® SmartWire Bundles with 1 Year Service Plan	
Model	Description
SL9648TW-1YR-BDL-ATT	SL9648TW 1 Year SmartWire Bundle with 48 Zones for ATT Cellular Network
SL9648TW-1YR-BDL-FLOW-ATT	SL9648TW 1 Year SmartWire Bundle with Flow with 48 Zones for ATT Cellular Network
SL9696TW-1YR-BDL-ATT	SL9696TW 1 Year SmartWire Bundle with 96 Zones for ATT Cellular Network
SL9696TW-1YR-BDL-FLOW-ATT	SL9696TW 1 Year SmartWire Bundle with Flow with 96 Zones for ATT Cellular Network

SmartLink® Solar Bundles with 1 Year Service Plan	
Model	Description
SL4800SLR-1YR-BDL-ATT	SmartLine Solar System - 48 Zones, 1-Year Bundle
SL4800SLR-1YR-BDL-FLOW-ATT	SmartLine Solar System - 48 Zones, 1-Year Bundle with Flow
SL9648TWSLR-1YR-BDL-ATT	SmartLine Solar SmartWire System - 48 Zones, 1-Year Bundle
SL9648TWSLR-1YR-BDL-FLOW-ATT	SmartLine Solar SmartWire System - 48 Zones, 1-Year Bundle with Flow
SL9696TWSLR-1YR-BDL-ATT	SmartLine Solar SmartWire System - 96 Zones, 1-Year Bundle
SL9696TWSLR-1YR-BDL-FLOW-ATT	SmartLine Solar SmartWire System - 96 Zones, 1-Year Bundle with Flow

Additional Year(s) Aircard Plans	
Model	Description
SL-PLAN1W	SmartLink® 1-Year Service Plan with Warranty
SL-PLAN1FW	SmartLink® 1-Year Service Plan plus Flow with Warranty
SL-FLOW1	SmartLink® 1-Year Flow only upgrade





SLFSI-T
PVC Tee - Flow Sensor



SLFSI-S
Saddle Tee - Flow Sensor



PROFESSIONAL MATERIALS

- ◆ Impeller – HDPE (High Density Polyethylene)
- ◆ Shaft – Tungsten Carbide
- ◆ O-ring – Buna-N
- ◆ Saddle, Sensor Housing, Retaining Nut – Type 1 PVC

PRESSURE RATING

- ◆ 150 PSI @ 90° F

TEMPERATURE RANGE

- ◆ 32° F to 140° F (0° to 60° C)

OUTPUT SIGNAL

- ◆ Frequency Range: 0.3 Hz to 200 Hz
- ◆ Output Pulse: 5 ms +/-25%

TRANSDUCER PERFORMANCE

- ◆ Quiescent current: 600 uA@8 VDC to 35 VDC max.
- ◆ Quiescent voltage: (VHigh)= Supply Voltage - (600uA X Supply Impedance)
- ◆ On State: (VLow)= Max. 1.2 VDC@50mA current limit, (10Ω +0.7VDC)

FLOW RANGE

0.25 to 12 FPS

- 1" saddle: 0.86 to 52 GPM 3" saddle: 6 to 300 GPM
- 1 1/2" saddle: 1.8 to 108 GPM 4" saddle: 10 to 480 GPM
- 2" saddle: 2.8 to 170 GPM

ELECTRICAL CABLE

- ◆ 2 single conductor solid copper U.L. listed #18 AWG leads with direct burial insulation
- ◆ Lead length: 48 inches
- ◆ Wiring may be extended up to 2,000 feet with direct burial, twisted pair shielded cable

Flow Sensor Specifications		International Model
Model	Description	
SLFSI-T10	1" Tee Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard	E-SLFSI-T10
SLFSI-T15	1 1/2" Tee Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard	E-SLFSI-T15
SLFSI-T20	2" Tee Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard	E-SLFSI-T20
SLFSI-S30	3" Saddle Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard	E-SLFSI-S30
SLFSI-S40	4" Saddle Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard	E-SLFSI-S40



PROFESSIONAL MATERIALS

- ◆ Impeller - HDPE (High Density Polyethylene)
- ◆ Mounting Tee & Retaining Nut - Lead Free Bronze Alloy C89833 Federalloy I-836
- ◆ Shaft - Tungsten Carbide
- ◆ O-ring - Buna-N
- ◆ Sensor Insert - Type 1 PVC

PRESSURE RATING

- ◆ 250 PSI Maximum working pressure

TRANSDUCER PERFORMANCE

- ◆ Quiescent current: 120 uA@8 VDC to 35 VDC max.
- ◆ Off State: (VHigh)= Supply Voltage - (120uA X Source Resistance)
- ◆ On State: (VLow)= Max. 0.85 Volts@50mA, (10Ω +0.7VDC)

FLOW RANGE

- ◆ 0.50 to 15 FPS
- ◆ 3 to 90 GPM (11 to 340 LPM)




SLFSI-B
Brass Tee -
Flow Sensor

Flow Sensor Specification

Model	Description
SLFSI-B15	1 1/2" Brass Tee Type Insert Flow Sensor - Used with the SmartLink® Flow Aircard

FLOW SENSOR PLACEMENT

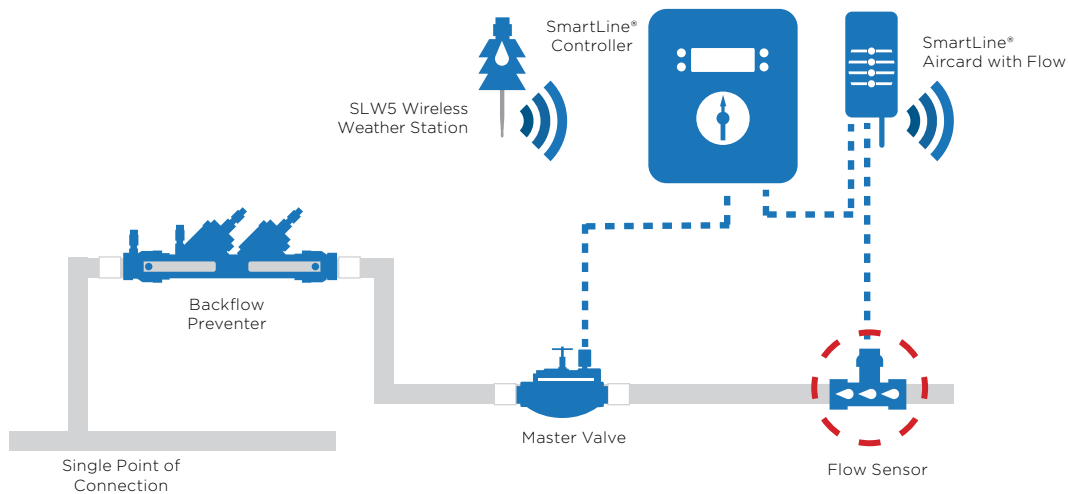

SmartLink™ Flow Sensor Model		SLFSI-T10	SLFSI-T15	SLFSI-T20	SLFSI-S30	SLFSI-S40	SLFSI-B15
Nominal Pipe Size		1"	1 1/2"	2"	3"	4"	1 1/2"
	Feet/Sec	GPM	GPM	GPM	GPM	GPM	GPM
Minimum Flow	0.25	0.86	1.8	2.8	6	10	
	1	3.5	7.24	11.3	25	40	5.5
	2	7	14.5	23	50	80	11
	3	10.4	22	34	75	120	16.5
	5	17	36	57	125	200	27.5
	7	24	51	79	175	280	38.5
	10	35	72	113	250	400	55
Maximum Flow	12	42	87	136	300	480	66
	15	52	108	170			83
Friction Loss at Max Flow		0.25 psi	0.18 psi	0.15 psi	0.15 psi	0.15 psi	0.18 psi



SLFA FLOW ASSEMBLIES

FEATURES

- ◆ Pre-sized with manufacturers required pipe length
- ◆ Includes master valve, flow sensor, schedule 80 pipe length and flanges and gasket/bolt kits
- ◆ Avoid errors in flow run pipe length size and fitting assembly
- ◆ Ready to glue and install

SLFA-T10-MAX



Flow Sensor with Max Valve Specifications	
Model	Description
SLFA-T10-MAX	1" Flanged Flow Assembly with MAX-DW-10 Master Valve and SLFA-T10 Flow Sensor
SLFA-T15-MAX	1 1/2" Flanged Flow Assembly with MAX-DW-15 Master Valve and SLFA-T15 Flow Sensor
SLFA-T20-MAX	2" Flanged Flow Assembly with MAX-DW-20 Master Valve and SLFA-T20 Flow Sensor


CombiFlow

The **SLF-COMBIFLOW** is a unique signal controlled device that conditions and scales the signals from two digital flow sensors and combines them into one scalable digital output. The SmartLink® Flow Aircard then perceives the signal is coming from a single flow sensor. It is compatible with the SLFSI Series Flow Sensors and most other sensors producing a square or sine wave output proportional to the rate of flow.




SLF-COMBIFLOW

SmartLink® Flow Accessories	
Model	Description
SLF-COMBIFLOW-100	Combines 2 separate flow Sensor's data to be used by 1 SmartLink® Flow Aircard

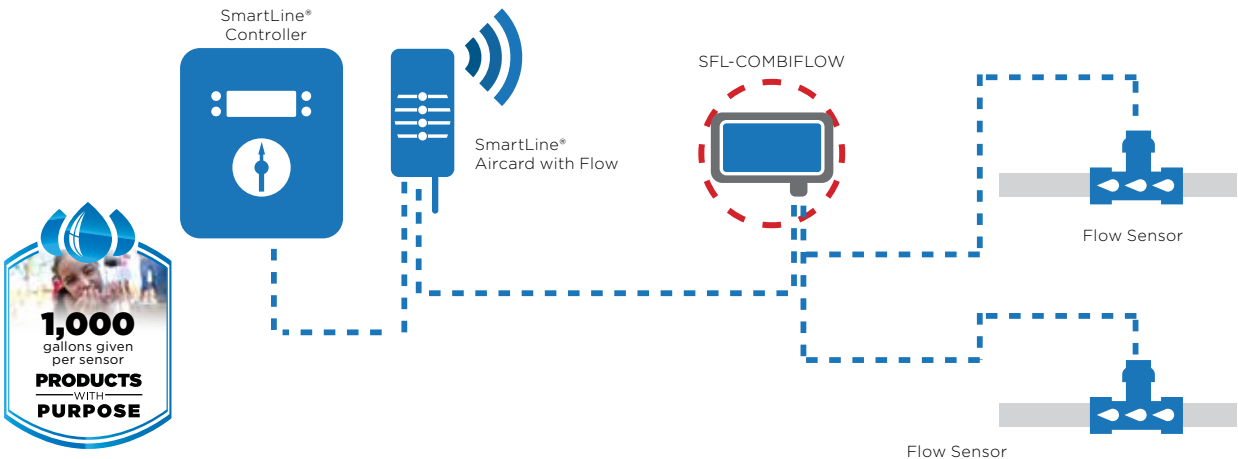

The **SLF-ISOFLOW-300** and **SLF-ISOFLOW-306** are signal control devices that receive the signal from a single SLFSI flow sensor and provide two electrically isolated outputs. These outputs can then separately be connected to 2 - 6 SmartLink®™ Flow Aircards.

The **SLF-ISOFLOW-306** enables up to 6 SmartLine®/SmartLink®™ Flow Aircard to share a single SLFSI flow sensor.

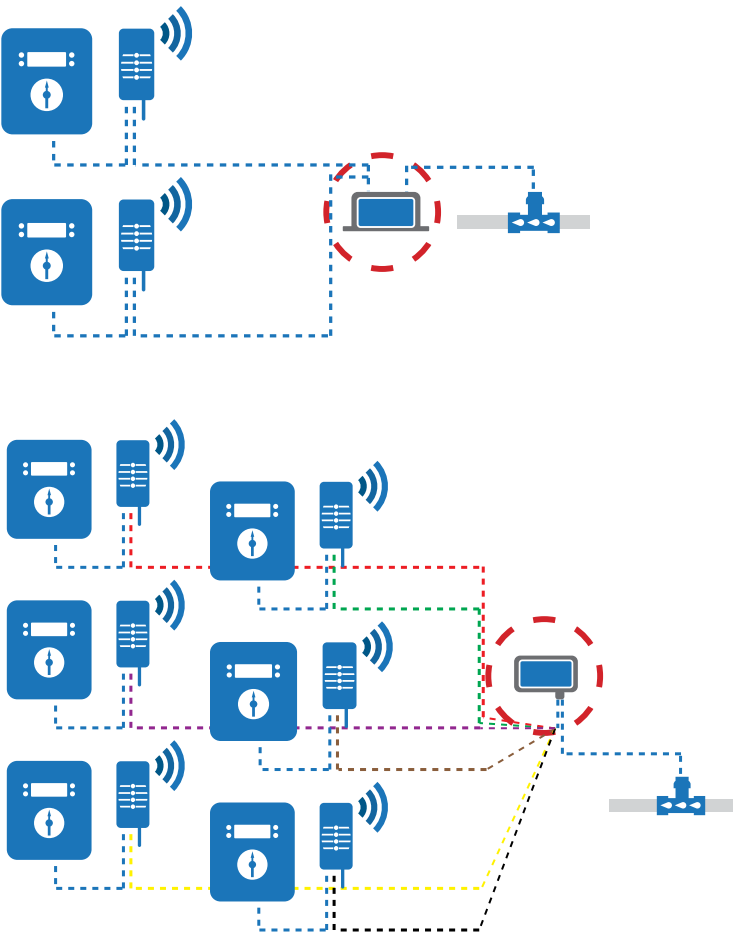

SLF-ISOFLOW-300



SLF-ISOFLOW-306

SmartLink®™ Flow Accessories	
Model	Description
SLF-ISOFLOW-300	Enables 2 SmartLink® Flow Aircards to share 1 SLFSI Flow Sensor
SLF-ISOFLOW-306	Enables 3 to 6 SmartLink® Flow Aircards to share 1 SLFSI Flow Sensor



SmartLink®™ Flow Accessories	
Model	Description
SLF-SIMFLOW	Flow Simulator with 36" Leads
SLF-DISPLAYFLOW	Digital Display Totalizer Inhousing
SLF-PCT-120	Hydrometer Pulse Converter
SLFLOW-WIRE-193-1000	19 Gauge, 3 wires, 1000 ft



SLF-SIMFLOW



SLF-DISPLAYFLOW

WireRide



SLF-WIRERIDE
Controller Module



SLF-WIRERIDE
Field Module

SmartLink [®] ™ Flow Accessories	
Model	Description
SLF-WIRERIDE	Add SLFSI Flow Sensor and a Master Valve Without Running New Wire to the Controller
SLF-WIRERIDE-HYD	Hydrometer Communication on Existing Wire
SLF-PCT-120	Hydrometer Pulse Converter

The **SLF-WIRERIDE** enables installation of a new Master Valve and Flow Sensor (or Hydrometer) on an irrigation system, without the need of running new wire back to the irrigation controller. With WireRide, the new Master Valve and Flow Sensor (or Hydrometer) essentially “hitch a ride” back to the controller using a nearby preexisting zone wire.

HOW IT WORKS

The WireRide Controller Module mounts near the SmartLine[®] controller. It routes the Master Valve, Flow Sensor (or Hydrometer), and the nearby Zone Valve to their corresponding location in the SmartLine[®] controller and to the SmartLink[®] Flow Aircard.

A simple walk-through of the example below:



Install the new Master Valve and Flow Sensor (or Hydrometer)

Locate a nearby preexisting Zone Valve

Connect the Zone valve, new Master and Flow Sensor (or Hydrometer) to the WireRide Field Module.

The existing Zone Valve wire is now being used by the Field Module to connect to the Controller Module.

The Controller Module mounts next to the SmartLine[®] controller and routes power and flow signals to the appropriate devices.

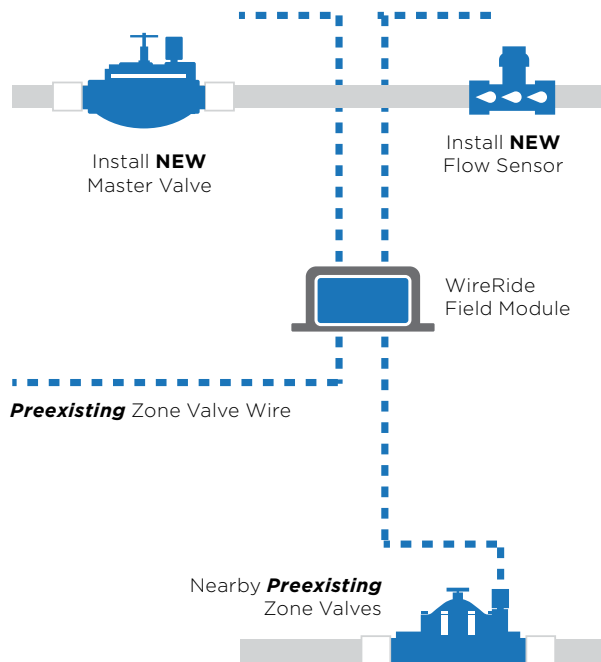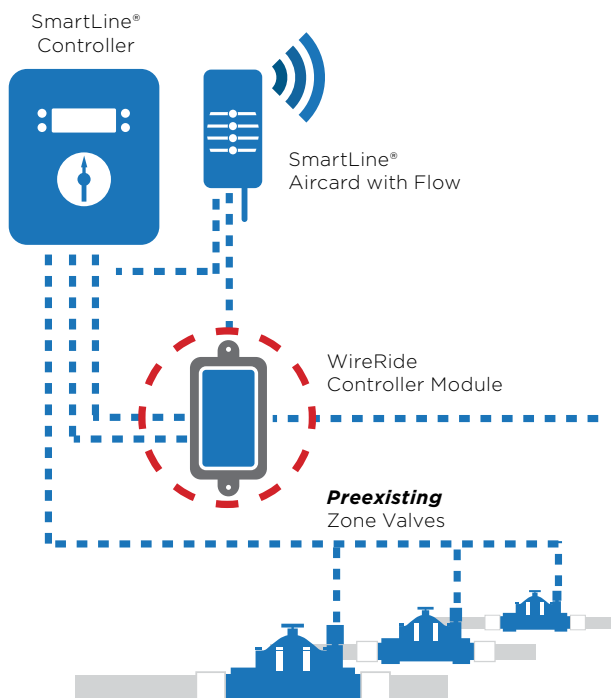



Rewards Program

By being a loyal Weathermatic customer, we are rewarding you with **CASH!**

Through MAX Rewards, we're partnering with you to:

- **Increase** your bottom line.
- **Improve** your irrigation system technology and practices to save water.
- **Impact** people's lives by donating clean water for every product purchased.

Here is how the MAX Rewards program works:

1. Enroll online or with our Customer Service department (U.S. market only).
2. Establish sales volumes and goals.
3. Start purchasing any Weathermatic products.
4. Submit your invoices or ask your distributor to submit your annual "proof of purchase report".
5. **Receive your annual MAX Rewards check!**

**Any Product -
Any Quantity**

It's that simple to earn **CASH!**
Join MAX Rewards today.

For more information and full terms and conditions:
weathermatic.com/MAXRewards



It all starts with WATER!

Water is the fastest growing utility expense today, but also suffers from the highest degree of waste, often exceeding 50%. At the same time, 844 million people in the 3rd world lack access to safe drinking water. Think about that for a moment. Herein lies a life-changing challenge and opportunity!

Weathermatic is on a mission to change the way we value and manage water. As the fundamental element of life and landscapes, we believe water deserves the passion and talents of our industry applied in all three service phases:

DESIGN

Begin with thoughtful water engineering in the planning phase to final verification of design integrity through contract administration.

INSTALLATION

Honor efficient designs with quality product application and proper scheduling, distribution, and pressure regulation.

MAINTENANCE

Provide a systematic process for water restriction compliance, remote monitoring, and inspections to identify repairs and enhancements.

The World's Leader in Smart Water Technology



At Weathermatic, we are building partnerships with professionals who share our:

WATER FIRST Commitment

These partnerships forged between a network of elite developers, consultants, installers, property managers, and landscape maintenance providers combine to deliver sustainable water management for a higher purpose.



PRODUCTS — WITH — PURPOSE

884 Million

people lack access to
Clean Drinking Water

How can you help
change that?

Our "**Products with Purpose**" initiative directly links every Weathermatic product purchase to the gift of life-saving water through drilling clean water wells for communities in crisis. So please join us by applying our market-leading smart technology and world class quality products and services.

Let's make a difference together by putting first things first.

Because we know in our businesses and in our lives: It all starts with WATER!

PRODUCTS WITH PURPOSE

Every product purchase leads to the gift of life-saving water through drilling clean water wells for communities in crisis. See how much each product can provide to those in need.



Product Category	Gallons Given Per Product
Nozzles	10
Sprays	25
Rotors	50
Residential Valves	50
Commercial Valves	100
Controllers	1,000
Sensors - SLW or Flow Sensor	1,000
SmartLink Residential Bundles	10,000
SmartLink Bundles	25,000



FEATURES

- ◆ 2 year trade warranty and 100% water tested
- ◆ 150 PSI (10.3 BAR) rating
- ◆ Unique “reverse flow” design permits equal pressure distribution on both sides of the diaphragm, regardless of line pressure, providing zero stress to prevent “stretching,” a common cause of valve failure
- ◆ Reverse flow design for water conservation in the event of failure
- ◆ Diaphragm’s self cleaning ports constantly flex, inhibiting sand and silt from blocking valve action
- ◆ Molded shock cone for smooth operation and reduction of water hammer
- ◆ Easy-to-use internal manual bleed lever; bleeds valve downstream; has positive stops for open and closed positions
- ◆ Marine-grade S20P solenoid with stainless steel actuator
- ◆ Engineering grade PVC body and Phillips retaining screws
- ◆ Non-rising flow control stem throttles valve from full open to closed position on flow control models

FLOW RANGE

0.2 to 35 GPM
0 to 8.5 m³/hr



Nitro Series Valve Pressure Loss			
Flow gpm	Loss PSI	Flow m³/hr	Loss BAR
0-4	1.2 max	0-1.0	0.09 max
4	1.2	1.0	0.09
6	1.7	1.5	0.14
8	2.5	2.0	0.19
10	3.0	2.5	0.22
12	3.4	3.0	0.25
14	3.8	3.5	0.28
16	4.1	4.0	0.30
18	4.4	4.5	0.32
20	4.6	5.0	0.33
22	4.8	5.5	0.35
24	5.1	6.0	0.38
26	5.4	6.5	0.41
28	5.8	7.0	0.45
30	6.3	7.5	0.47
32	6.6	8.0	0.50
35	7.3	8.5	0.51



N-100-H



N-100F-H



N-100S-H



N-100SF-H



N-100MB-H



N-100MBF-H

ELECTRICAL

Wiring requires a single lead from the controller to each solenoid, plus a common neutral to all solenoids; type UF wire, U.L. listed, is recommended for all hookups

24VAC/60Hz	24VAC/50Hz
Inrush: 9.48 VA	Inrush: 10.66 VA
Holding: 5.11 VA	Holding: 5.97 VA

Nitro Specifications

Model	Description	Factory Installed Options (choose one)		Valve Dimensions			International Model
				Length	Width	Height	
N-100-H	1" Valve - FIP *	-XPR	-NP	4.88" 12.40 cm	3.25" 8.23 cm	5" 12.7 cm	N-100-ISO-H
N-100F-H	1" Valve - FIP with Flow Control *	Pressure Regulator-the Weathermatic XPR pressure regulating module senses inlet pressure and maintains constant outlet pressure.	Non-potable alert flow handle may be substituted for the standard flow handle				N-100F-ISO-H
N-100S-H	1" Valve - Slip x Slip						
N-100SF-H	1" Valve - Slip x Slip with Flow Control						
N-100MB-H	1" Valve - Male x Barb						
N-100MBF-H	1" Valve - Male x Barb with Flow Control						

SilverBulletHP

FEATURES

- ◆ 5 year trade warranty and 100% water tested
- ◆ 150PSI (10.3 BAR) rating
- ◆ Unique “reverse flow” design permits equal pressure distribution on both sides of the diaphragm, regardless of line pressure, providing zero stress to prevent “stretching,” a common cause of valve failure
- ◆ Reverse flow design for water conservation in the event of failure
- ◆ Diaphragm’s self cleaning ports constantly flex, inhibiting sand and silt from blocking valve action
- ◆ Molded shock cone for smooth operation and reduction of water hammer
- ◆ Easy-to-use internal manual bleed lever; bleeds valve downstream; has positive stops for open and closed positions
- ◆ Marine-grade S20P solenoid with stainless steel actuator
- ◆ High-strength glass-filled nylon body and cover with 1/4" stainless steel cover bolts and mating brass body inserts
- ◆ Non-rising flow control stem throttles valve from full open to closed position on flow control models
- ◆ New design
- ◆ Pressure activated diaphragm
- ◆ Valve identification system

FLOW RANGE

0.2 to 180 GPM
0 to 3.5 m³/hr

ELECTRICAL

Wiring requires a single lead from the controller to each solenoid, plus a common neutral to all solenoids; type UF wire, U.L. listed, is recommended for all hookups



24VAC/60Hz	24VAC/50Hz
Inrush: 9.48 VA	Inrush: 10.66 VA
Holding: 5.11 VA	Holding: 5.97 VA



SB-10-HP



SB-10F-HP



SB-15-HP



SB-20-HP

Silver Bullet Series Valve Pressure Loss

Flow gpm	SB-10-HP 1"	SB-15-HP 1 1/2"	SB-20-HP 2"	Flow m ³ /hr	SB-10-HP-ISO 2.54 cm	SB-15-HP-ISO 3.81 cm	SB-20-HP-ISO 5.08 cm
0-4	1.2 max			0-0.9	0.08		
6	1.7			1.0	0.12		
8	2.5			2.0	0.17		
10	3.0			2.5	0.21		
15	3.9			3.0	0.27		
20	4.6	1.3		5.0	0.32	0.09	
25	5.2	1.6		6.0	0.36	0.11	
30	6.3	1.9		7.0	0.43	0.13	
35	7.3	2.4		8.0	0.50	0.17	
40		3.0	2.3*	9.0		0.21	0.16*
45		3.8	2.4	10.0		0.26	0.17
50		4.6	2.6	11.0		0.32	0.18
55		5.6	2.7	12.0		0.39	0.19
60		6.7	2.9	14.0		0.46	0.20
70		9.5	3.3	16.0		0.66	0.23
80		13.0	3.4	18.0		0.90	0.23
90			4.2	20.0			0.29
100			5.2	22.0			0.36
110			6.7	24.0			0.46
120			7.7	26.0			0.53
130			8.8	30.0			0.61

* Minimum recommended flow for valves with XPR option or PRK-24 accessory.


Silver Bullet (12000 Series) Specifications

Model	Description	Factory Installed Options (choose one)		Valve Dimensions			International Model
		-XPR	-NP	Length	Width	Height	
SB-10-HP	1" 24 VAC						SB-10-HP-ISO (12024E-10-H-ISO)
SB-10F-HP	1" 24 VAC with Flow Control	Pressure Regulator-the Weathermatic XPR pressure regulating module senses inlet pressure and maintains constant outlet pressure.	Non-potable alert flow handle may be substituted for the standard flow handle	5"	12.7cm	3.13" 7.95 cm	SB-10F-HP-ISO (12024EF-10-H-ISO)
SB-15-HP	1 1/2" VAC with Flow Control						SB-15-HP-ISO (12024EF-15-H-ISO)
SB-20-HP	2" VAC with Flow Control						SB-20-HP-ISO (12024EF-20-H-ISO)

BlackBullet MAX*

FEATURES

- ◆ 10 year trade warranty and 100% water tested
- ◆ 225 PSI (15.5 BAR) rating
- ◆ S24B high-efficiency solenoid for positive opening at high pressures; includes stainless steel actuator and brass threads for long life
- ◆ Reverse flow design for water conservation in the event of failure
- ◆ Diaphragm's self cleaning ports constantly flex, inhibiting sand and silt from blocking valve action
- ◆ Brass shock cone for smooth operation and reduction of water hammer
- ◆ Easy-to-use internal manual bleed lever; bleeds valve downstream; has positive stops for open and closed positions
- ◆ High-strength glass-filled body and cover with 1/4" stainless steel cover bolts and mating brass body inserts
- ◆ Brass non-rising flow control stem throttles valve from full open to closed position
- ◆ Excellent for low volume irrigation
- ◆ Contamination-resistant (CR)
- ◆ Chlorine- and chloramine-resistant EPDM diaphragm material



Replaces Black Bullet
(21000 Series) valve



MAX-DW-15



MAX-DW WITH XPR OPTION

Black Bullet Max Valve Pressure Loss							
Flow gpm	MAX-DW-10 1"	MAX-DW-15 1½"	MAX-DW-20 2"	Flow m³/hr	MAX-DW-10 2.54 cm	MAX-DW-15 3.81 cm	MAX-DW-20 5.08 cm
0-4	1.2 max			0-0.9	0.08 max		
6	1.4			1.0	0.10		
8	1.6			2.0	0.12		
10	1.7*			2.5	0.13*		
15	2.0			3.0	0.14		
20	2.3	1.3*		5.0	0.18	0.10*	
25	3.0	1.6		6.0	0.24	0.12	
30	4.3	1.9		7.0	0.32	0.14	
35	6.0	2.4		8.0	0.43	0.17	
40	7.7	3.0	2.3*	9.0	0.54	0.21	0.16*
45	9.5	3.8	2.4	10.0	0.64	0.26	0.17
50	11.5	4.6	2.6	11.0	0.77	0.31	0.17
55		5.6	2.7	12.0		0.37	0.18
60		6.7	2.9	14.0		0.51	0.20
70		9.5	3.3	16.0		0.68	0.23
80		13.0	3.4	18.0		0.90	0.23
90			4.2	20.0			0.29
100			5.2	22.0			0.34
110			6.7	24.0			0.42
120			7.7	26.0			0.50
130			8.8	30.0			0.62

* Minimum recommended flow for valves with XPR option or PRK-24 accessory.

FLOW RANGE

0.2 to 130 GPM
0 to 30.0 m³/hr

ELECTRICAL

Wiring requires a single lead from the controller to each solenoid, plus a common neutral to all solenoids; type UF wire, U.L. listed, is recommended for all hookups

24VAC/60Hz

Inrush: 9.86 VA

Holding: 5.69 VA

24VAC/50Hz

Inrush: 10.7 VA

Holding: 7.5 VA



Black Bullet Max (11000 Series) Specifications (Replaces Black Bullet (21000 Series))										International Model
Model	Description	Factory Installed Options (choose one)		Valve Dimensions						
				Length		Width		Height		
MAX-DW-10	Dirty Water 1" 24 VAC	-XPR Pressure Regulator-the Weathermatic XPR pressure regulating module senses inlet pressure and maintains constant outlet pressure.	-NP Non-potable alert flow handle may be substituted for the standard flow handle	5"	12.7cm	3.13"	7.95 cm	4.75"	12.07 cm	MAX-DW-10-ISO (11024FCR-10D-ISO)
MAX-DW-15	Dirty Water 1 1/2" 24 VAC			5.75"	14.61 cm	4.50"	11.43 cm	4.88"	12.40 cm	MAX-DW-15-ISO (11024FCR-15D-ISO)
MAX-DW-20	Dirty Water 2" 24 VAC			7.25"	18.42 cm	5"	12.7 cm	6"	15.24 cm	MAX-DW-20-ISO (11024FCR-20D-ISO)

BronzeBullet

FEATURES

- ◆ 10 year trade warranty and 100% water tested
- ◆ 225 PSI (15.5 BAR) rating
- ◆ S24B high-efficiency solenoid for positive opening at high pressures; includes stainless steel actuator and brass threads for long life
- ◆ Bronze body and cover with stainless steel bolts
- ◆ Bronze material with 82% copper content
- ◆ Reverse flow design for water conservation in the event of failure
- ◆ Diaphragm's self cleaning ports constantly flex, inhibiting sand and silt from blocking valve action
- ◆ Brass shock cone for smooth operation and reduction of water hammer
- ◆ Easy-to-use internal manual bleed lever; bleeds valve downstream; has positive stops for open and closed positions
- ◆ High-strength glass-filled body and cover with 1/4" stainless steel cover bolts and mating brass body inserts
- ◆ Brass non-rising flow control stem throttles valve from full open to closed position
- ◆ Excellent for low volume irrigation
- ◆ Contamination-resistant (CR)
- ◆ Chlorine- and chloramine-resistant EPDM diaphragm material

OPTIONS (FACTORY INSTALLED)

- ◆ XPR Pressure Regulator-the Weathermatic XPR pressure regulating module senses inlet pressure and maintains constant outlet pressure. (see PRK-24 in valve accessory section for specifications)
- ◆ Non-potable alert flow handle may be substituted for the standard flow handle. Add -NP suffix.

FLOW RANGE

0.2 to 400 GPM
0 to 90.0 m³/hr



8200CR

ELECTRICAL

Wiring requires a single lead from the controller to each solenoid, plus a common neutral to all solenoids; type UF wire, U.L. listed, is recommended for all hookups.

24VAC/60Hz	24VAC/50Hz
Inrush: 9.86 VA	Inrush: 10.7 VA
Holding: 5.69 VA	Holding: 7.5 VA



Bronze Bullet Specifications		Factory Installed Options (choose one)		Valve Dimensions						International Model
Model	Description			Length		Width		Height		
8200CR-10D	1" Red Brass Valve - 24VAC with Flow Control	-XPR	-NP	4.75"	12.07 cm	3.63"	9.22 cm	5.25"	13.34 cm	8200CR-10D-ISO
8200CR-12D	1¼" Red Brass Valve - 24VAC with Flow Control			4.75"	12.07 cm	3.63"	9.22 cm	5.25"	13.34 cm	8200CR-12D-ISO
8200CR-15D	1½" Red Brass Valve - 24VAC with Flow Control			5.06"	12.85 cm	4.00"	10.16 cm	5.75"	14.61 cm	8200CR-15D-ISO
8200CR-20D	2" Red Brass Valve - 24VAC with Flow Control			6.63"	16.84 cm	4.88"	12.40 cm	7.25"	18.42 cm	8200CR-20D-ISO
8200CR-25D	2½" Red Brass Valve - 24VAC with Flow Control			8.00"	20.32 cm	6.25"	15.88 cm	8.00"	20.32 cm	8200CR-25D-ISO
8200CR-30D	3" Red Brass Valve - 24VAC with Flow Control			8.75"	22.23 cm	7.00"	17.78 cm	8.50"	21.59 cm	8200CR-30D-ISO

XPR - Pressure Regulator-the Weathermatic XPR pressure regulating module senses inlet pressure and maintains constant outlet pressure.

NP - Non-potable alert flow handle may be substituted for the standard flow handle

Bronze Bullet Valve Pressure Loss													
Flow gpm	8200CR-10D 1"	8200CR-12D 1 1/4"	8200CR-15D 1 1/2"	8200CR-20D 2"	8200CR-25D 2 1/2"	8200CR-30D 3"	Flow m3/h	8200CR-10D 2.54 cm	8200CR-12D 3.18 cm	8200CR-15D 3.81 cm	8200CR-20D 5.08 cm	8200CR-25D 6.35 cm	8200CR-30D 7.62 cm
0 - 10	1.5 max						0 - 2.3	0.10 max					
12	1.8*						3.0	0.14*					
16	2.4	1.9*					4.0	0.19	0.15*				
20	3.1	2.3	1.4*				5.0	0.25	0.19	0.11*			
25	4.0	3.0	1.7				6.0	0.30	0.22	0.13			
30	4.9	3.5	2.1				7.0	0.35	0.26	0.15			
35	5.9	4.1	2.5				8.0	0.42	0.30	0.17			
40	7.2	4.7	2.9	1.1*			9.0	0.50	0.33	0.20	0.08*		
45		5.5	3.3	1.3			10.0		0.37	0.23	0.08		
50		6.3	3.7	1.5			11.0		0.43	0.25	0.10		
55			4.2	1.8			12.0			0.28	0.12		
60			4.8	2.0	1.0*	0.5*	14.0			0.35	0.15	0.08*	0.04*
70			6.2	2.6	1.4	0.7	16.0			0.43	0.19	0.10	0.05
80			7.9	3.4	1.8	0.9	18.0			0.54	0.24	0.12	0.06
90			10.1	4.3	2.1	1.1	20.0			0.68	0.29	0.15	0.08
100				5.3	2.6	1.3	24.0				0.42	0.20	0.10
120				8.0	3.6	1.8	28.0				0.61	0.27	0.13
140				12.0	4.8	2.4	32.0				0.84	0.34	0.17
160				18.2	6.1	3.1	36.0				1.23	0.42	0.21
180					7.5	3.8	40.0					0.51	0.27
200					9.1	4.6	50.0					0.77	0.40
250					14.0	7.1	60.0					1.09	0.56
300					19.6	10.1	70.0					1.45	0.76
350						13.8	80.0						1.00
400						19.3	90.0						1.34

* Minimum recommended flow for valves with XPR option or PRK-24 accessory.

Valve Accessories

SMART CONTROL ZONES

- ◆ Saves time with pre-assembled valve, filter, and pressure regulator
- ◆ Ultra low-flow capability (1 Gallon per Hour)
- ◆ Wye filter with 150 mesh stainless steel screen and $\frac{3}{4}$ inch hose-thread flush outlet
- ◆ 16 gauge stainless steel or powder-coated metal wall-mount cabinet or enclosure options
- ◆ 25 or 40 psi pressure regulator options
- ◆ Patented self-cleaning valve diaphragm
- ◆ Patented manual bleed lever. No twisting on a solenoid or bleed screw is required
- ◆ Pressure activated diaphragm ensures reliable operation with no leakage at pressures up to 150 – 200 psi
- ◆ Innovative valve shock cone interrupts the water flow more gradually than other diaphragms to enable quick valve closure without the damaging effect of water hammer
- ◆ Residential, light commercial and commercial options available
- ◆ 2-year warranty (MAX valve – 10-year warranty)

Smart Control Zone Specifications

Model	Description
SCZ-N-100F-H	Nitro Control Zone (1" FIP with flow control, 1" x $\frac{3}{4}$ " Wye filter & 25 psi reg)
SCZ-SB-10F-HP	Silver Bullet Control Zone (1" FIP with flow control, 1" x $\frac{3}{4}$ " Wye filter & 25 psi reg)
SCZ-MAX-DW-10	Black Bullet Max Control Zone (1" FIP with flow control, 1" x 1" Wye filter & 40 psi reg)



SCZ-N-100F-H



SCZ-SB-10F-HP



SCZ-MAX-DW-10



Valve Accessories



PRK-24 (XPR) PRESSURE REGULATOR

- ◆ The Weathermatic PRK-24 (XPR) pressure regulating module senses inlet pressure and maintains constant outlet pressure regardless of inlet pressure variation
- ◆ Maximum inlet pressure: 150 PSI (10.3 BAR)
- ◆ Minimum flow (see valve tables)
- ◆ Maximum flow (see valve tables)
- ◆ Minimum pressure differential between inlet and outlet: 10 PSI (0.7 BAR)
- ◆ Regulated pressure range at outlet: 15 - 110 PSI (±5 PSI)
1.0 - 7.6 BAR (± 0.35 BAR)
- ◆ Manual flow and bleed control
- ◆ Regulates pressure when valve is operated electrically or manually
- ◆ Downstream connection for accurate pressure sensing
- ◆ Schrader valve for connecting pressure gauge

NO. 910 AUTOMATIC DRAIN VALVE

- ◆ Small, compact, spring-loaded valve designed especially to drain sprinkler systems
- ◆ Fine screen on intake and drain ends prevents clogging from either direction
- ◆ Has a 5 oz. bronze spring that opens valve against a 6' head (1.8 m/hd) of water, insuring drainage in all sections of the system
- ◆ Drain will close tight on three pounds line pressure
- ◆ Not recommended for pipe lines under continuous pressure. 1/2" male IPS connection.



PRG-24 PRESSURE HOSE GAUGE ASSEMBLY

- ◆ Monitors valve outlet pressure
- ◆ Quick connect hose fitting for Schrader valve on Weathermatic PRK-24 (XPR) regulators
- ◆ Gauge provides accurate reading of outlet pressure on 0 - 160 PSI scale or secondary 0 - 1100 KPA unit scale; 36" (91 cm) long high-pressure hose permits easy reading of gauge



NO. 906 & 906L VALVE CAPS

- ◆ Provides access to manual valves
- ◆ Brass hinged cover
- ◆ Molded high-impact plastic body allows welding to 2" PVC pipe
- ◆ 906L has locking cover
- ◆ Key (RLK-1) may be ordered separately



PRE-FILLED VALVE WIRING CONNECTORS

- ◆ Eliminates sealant mess
- ◆ Quick, easy and waterproof
- ◆ WC - 14 accommodates 10, 12, or 14 gauge wire sizes
- ◆ WC - 18 accommodates 16, 18, or 22 gauge wire sizes



WC - 18



WC - 14

MAXSpray

 Replaces LX Series Sprays



MAX and MAXPRS Accessories



MAX-EXT
6" Riser Extension

MAXS Shrub Adapter
1/2" female inlet threads
except all industry-standard
female nozzles

MAX-NP
Non-Potable Cover

FEATURES

MAX SEAL

- ◆ Industry first dual pressure-activated seal with 720 degree sealing surface around flow tube stem, cap, and body eliminates stick-ups and cap to body leaks
- ◆ Industry standard white Santoprene seal for ultimate performance

MAX SPRING

- ◆ Industry's strongest spring for positive retraction
- ◆ Corrosion resistant stainless steel material for long life
- ◆ Unique reversible spring design can be installed in either direction for simple, fast field assembly

MAX SELF-CLEANING CHECK VALVE

- ◆ Enhanced debris resistance through expanded surface area
- ◆ Tapered design for self-cleaning operation
- ◆ Positive seal even in dirty water environment

MAX LEVEL CAP

- ◆ Flat cap and easy pull up, low profile flush plug for sprinkler leveling
- ◆ Superior labeling process allows better identification and customization

MAX NOZZLE OPTIONS

- ◆ Compatible with all industry-standard female thread nozzles

OPERATING DATA

- ◆ Pressure range: 15 - 70 PSI (1.0 - 4.8 BAR)
- ◆ Flow-by: Zero @ 5 PSI (0.3) or greater
- ◆ Factory installed check valve:
14 ft/hd @ 18 PSI (4.3 m/hd @ 1.2 BAR)

MAX Spray Specification

Dimensions
1/2" Female Threaded inlets

Model	Pop-up Height		Body Height	
MAX4	4"	10 cm	6 1/4"	15.9 cm
MAX6	6"	15 cm	8 1/2"	21.6 cm
MAX12	12"	30 cm	15 1/4"	38.7 cm
MAX4-CV	4"	10 cm		
MAX6-CV	6"	15 cm		
MAX12-CV	12"	30 cm		
MAX-EXT	6" riser extension			
MAX-NP	Non-Potable Cover			
Exposed Cover			2 1/4"	5.7 cm



FEATURES

MAX SEAL

- ◆ Industry first dual pressure-activated seal with 720 degree sealing surface around flow tube stem, cap, and body eliminates stick-ups and cap to body leaks
- ◆ Industry standard white Santoprene seal for ultimate performance

MAX SPRING

- ◆ Industry's strongest spring for positive retraction
- ◆ Corrosion resistant stainless steel material for long life
- ◆ Unique reversible spring design can be installed in either direction for simple, fast field assembly

MAX SELF-CLEANING CHECK VALVE

- ◆ Enhanced debris resistance through expanded surface area
- ◆ Tapered design for self-cleaning operation
- ◆ Positive seal even in dirty water environment

MAX PRESSURE REGULATION

- ◆ Reduces water consumption by up to 50%
- ◆ Eliminates wasted water caused by high pressure - no misting and fogging
- ◆ Optimizes outlet pressure for consistent performance, even with pressure variations

MAX LEVEL CAP

- ◆ Flat cap and easy pull up, low profile flush plug for sprinkler leveling
- ◆ Superior labeling process allows better identification and customization

MAX NOZZLE OPTIONS

- ◆ Compatible with all industry-standard female thread nozzles

OPERATING DATA

Factory installed check valve:
14 ft/hd @ 18 PSI (4.3 m/hd @ 1.2 BAR)



MAX4PRS30
MAX4PRS40

MAX6PRS30
MAX6PRS40

MAX12PRS30
MAX12PRS40
with side - inlet



MAXPRS30 Spray Specification

Model	Description	Dimensions ½" Female Threaded inlets			
		Pop-up Height	Body Height		
MAX4PRS30	MAX4 Pop-Up Sprayhead with 30 PSI regulated stem	6 1/4"	15.9 cm	4"	10 cm
MAX6PRS30	MAX6 Pop-Up Sprayhead with 30 PSI regulated stem	8 1/2"	21.6 cm	6"	15 cm
MAX12PRS30	MAX6 Pop-Up Sprayhead with 30 PSI regulated stem	15 1/4"	38.7 cm	12"	30 cm
MAX4PRS30-CV	MAX4 Pop-Up Sprayhead with 30 PSI regulated stem & Check Valve	6 1/4"	15.9 cm	4"	10 cm
MAX6PRS30-CV	MAX6 Pop-Up Sprayhead with 30 PSI regulated stem & Check Valve	8 1/2"	21.6 cm	6"	15 cm
MAX12PRS30-CV	MAX6 Pop-Up Sprayhead with 30 PSI regulated stem & Check Valve	15 1/4"	38.7 cm	12"	30 cm
Exposed Cover		2 1/4"	5.7 cm		



MAXPRS40 LX Spray Specification

Model	Description	Dimensions ½" Female Threaded inlets			
		Pop-up Height	Body Height		
MAX4PRS40	MAX4 Pop-Up Sprayhead with 40 PSI regulated stem	6 1/4"	15.9 cm	4"	10 cm
MAX6PRS40	MAX6 Pop-Up Sprayhead with 40 PSI regulated stem	8 1/2"	21.6 cm	6"	15 cm
MAX12PRS40	MAX6 Pop-Up Sprayhead with 40 PSI regulated stem	15 1/4"	38.7 cm	12"	30 cm
MAX4PRS40-CV	MAX4 Pop-Up Sprayhead with 40 PSI regulated stem & Check Valve	6 1/4"	15.9 cm	4"	10 cm
MAX6PRS40-CV	MAX6 Pop-Up Sprayhead with 40 PSI regulated stem & Check Valve	8 1/2"	21.6 cm	6"	15 cm
MAX12PRS40-CV	MAX6 Pop-Up Sprayhead with 40 PSI regulated stem & Check Valve	15 1/4"	38.7 cm	12"	30 cm



8 Series



10 Series



12 Series



15 Series



15/9 Strip Series



5 Stream/
Bubbler Series

FEATURES

Color-coded for easy identification

- ◆ Matched precipitation rates across sets and across patterns in each numbered series
- ◆ LX Series screens maintain precise radius adjustments
- ◆ (screen included with every nozzle)
- ◆ Stainless steel radius adjustment screw
- ◆ Reusable, dual compartment resealable bags

APPLICATIONS

- ◆ For use with all LX Series sprayheads
- ◆ Fits all industry-standard sprayheads with male thread risers
- ◆ Fits LXS, No. 72 and No. 73 Shrub Adapters

OPERATING DATA

- ◆ Precipitation rate: 1.67 – 5.33" per hour (37 – 144 mm/h)
- ◆ Spacing: 5 – 15' (1.5 – 4.6 m)
- ◆ Pressure: 15 – 30 PSI (1.0 – 2.1 BAR)
- ◆ Flow range: 0.3 - 3.7 GPM (0.1 - 0.8 m³/hr)
- ◆ MPR performance was determined with nozzles mounted on 4" (10.2 cm) pop-ups. ASAE standard of .01" per hour was used to determine listed radius



8 Series 5° Spray Trajectory											
Nozzle	Arc	Pressure PSI	Radius ft	Flow gpm	Precip. in/hr ■	Precip. in/hr ▲	Pressure BAR	Radius m	Flow m ³ /hr	Precip. mm/hr ■	Precip. mm/hr ▲
8F	360°	15	5	1.2	4.62	5.33	1.0	1.5	0.27	120	139
		20	6	1.3	3.48	4.01	1.4	1.8	0.30	93	107
		25	7	1.4	2.75	3.18	1.7	2.1	0.32	73	84
		30	8	1.6	2.41	2.78	2.1	2.4	0.36	63	72
8H	180°	15	5	0.6	4.62	5.33	1.0	1.5	0.14	124	144
		20	6	0.7	3.74	4.32	1.4	1.8	0.16	99	114
		25	7	0.7	2.75	3.18	1.7	2.1	0.16	73	84
		30	8	0.8	2.41	2.78	2.1	2.4	0.18	63	72
8T	120°	15	5	0.4	4.62	5.33	1.0	1.5	0.09	120	139
		20	6	0.4	3.21	3.70	1.4	1.8	0.09	83	96
		25	7	0.5	2.95	3.40	1.7	2.1	0.11	75	86
		30	8	0.5	2.26	2.60	2.1	2.4	0.11	57	66
8Q	90°	15	5	0.3	4.62	5.33	1.0	1.5	0.07	124	144
		20	6	0.3	3.21	3.70	1.4	1.8	0.07	86	100
		25	7	0.4	3.14	3.63	1.7	2.1	0.09	82	94
		30	8	0.4	2.41	2.78	2.1	2.4	0.09	63	72

■ Square spacing based on 50% of diameter

▲ Triangular spacing based on 50% of diameter

Max radius reduction with adjustment screw is 25%

10 Series 15° Spray Trajectory											
Nozzle	Arc	Pressure PSI	Radius ft	Flow gpm	Precip. in/hr ■	Precip. in/hr ▲	Pressure BAR	Radius m	Flow m ³ /hr	Precip. mm/hr ■	Precip. mm/hr ▲
10F	360°	15	7	1.2	2.36	2.72	1.0	2.1	0.27	61	71
		20	8	1.3	1.96	2.26	1.4	2.4	0.30	52	60
		25	9	1.4	1.66	1.92	1.7	2.7	0.32	44	51
		30	10	1.6	1.54	1.78	2.1	3.0	0.36	40	46
10H	180°	15	7	0.6	2.36	2.72	1.0	2.1	0.14	63	73
		20	8	0.7	2.11	2.43	1.4	2.4	0.16	56	64
		25	9	0.7	1.66	1.92	1.7	2.7	0.16	44	51
		30	10	0.8	1.54	1.78	2.1	3.0	0.18	40	46
10T	120°	15	7	0.4	2.36	2.72	1.0	2.1	0.09	61	71
		20	8	0.4	1.80	2.08	1.4	2.4	0.09	47	54
		25	9	0.5	1.78	2.06	1.7	2.7	0.11	45	52
		30	10	0.5	1.44	1.67	2.1	3.0	0.11	37	42
10Q	90°	15	7	0.3	2.36	2.72	1.0	2.1	0.07	63	73
		20	8	0.3	1.80	2.08	1.4	2.4	0.07	49	56
		25	9	0.4	1.90	2.20	1.7	2.7	0.09	49	57
		30	10	0.4	1.54	1.78	2.1	3.0	0.09	40	46

■ Square spacing based on 50% of diameter

▲ Triangular spacing based on 50% of diameter

Max radius reduction with adjustment screw is 25%



8 Series



10 Series



12 Series



15 Series



15/9 Strip Series



5 Stream/
Bubbler Series

12 Series 30° Spray Trajectory

Nozzle	Arc	Pressure PSI	Radius ft	Flow gpm	Metric						
					Precip. in/hr	Precip. in/hr	Pressure BAR	Radius m	Flow m ³ /hr	Precip. mm/hr	Precip. mm/hr
12F	360°	15	9	1.8	2.14	2.47	1.0	2.7	0.41	56	65
		20	10	2.1	2.02	2.33	1.4	3.0	0.48	53	62
		25	11	2.4	1.91	2.20	1.7	3.3	0.55	51	58
12H	180°	15	9	0.9	2.14	2.47	1.0	2.7	0.20	55	63
		20	10	1.0	1.93	2.22	1.4	3.0	0.23	51	59
		25	11	1.2	1.91	2.20	1.7	3.3	0.27	50	57
12T	120°	15	9	0.6	2.14	2.47	1.0	2.7	0.14	58	67
		20	10	0.7	2.02	2.33	1.4	3.0	0.16	53	62
		25	11	0.8	1.91	2.20	1.7	3.3	0.18	50	57
12Q	90°	15	9	0.5	2.38	2.74	1.0	2.7	0.11	60	70
		20	10	0.5	1.93	2.22	1.4	3.0	0.11	49	56
		25	11	0.6	1.91	2.20	1.7	3.3	0.14	51	59
12TT	240°	15	9	1.1	1.93	2.46	1.0	2.7	0.25	51	65
		20	10	1.3	1.85	2.00	1.4	3.0	0.29	48	53
		25	11	1.5	1.73	1.65	1.7	3.3	0.33	45	43
12TQ	270°	15	9	1.3	2.07	2.46	1.0	2.7	0.30	55	65
		20	10	1.5	1.96	2.00	1.4	3.0	0.35	52	53
		25	11	1.7	1.83	1.65	1.7	3.3	0.40	49	43

■ Square spacing based on 50% of diameter

▲ Triangular spacing based on 50% of diameter

Max radius reduction with adjustment screw is 25%

15 Series 30° Spray Trajectory

Nozzle	Arc	Pressure PSI	Radius ft	Flow gpm	Metric						
					Precip. in/hr	Precip. in/hr	Pressure BAR	Radius m	Flow m ³ /hr	Precip. mm/hr	Precip. mm/hr
15F	360°	15	11	2.6	2.07	2.39	1.0	3.4	0.59	51	59
		20	12	3.0	2.01	2.32	1.4	3.7	0.68	50	57
		25	14	3.3	1.62	1.87	1.7	4.3	0.75	41	47
15H	180°	15	11	1.3	2.07	2.39	1.0	3.4	0.30	52	60
		20	12	1.5	2.01	2.32	1.4	3.7	0.34	50	57
		25	14	1.7	1.67	1.93	1.7	4.3	0.39	42	49
15T	120°	15	11	0.9	2.15	2.48	1.0	3.7	0.20	52	60
		20	12	1.0	2.01	2.32	1.4	3.7	0.23	50	58
		25	14	1.1	1.62	1.87	1.7	4.3	0.25	41	47
15Q	90°	15	11	0.7	2.23	2.57	1.0	3.4	0.16	55	64
		20	12	0.8	2.14	2.47	1.4	3.7	0.18	53	61
		25	14	0.8	1.57	1.81	1.7	4.3	0.18	39	45
15TT	240°	15	11	1.6	1.96	2.39	1.0	3.4	0.38	49	60
		20	12	1.9	1.90	2.00	1.4	3.7	0.44	48	58
		25	14	2.1	1.55	1.47	1.7	4.3	0.48	39	48
15TQ	270°	15	11	2.1	2.24	2.39	1.0	3.4	0.49	57	60
		20	12	2.5	2.20	3.00	1.4	3.7	0.57	56	58
		25	14	2.8	1.82	1.47	1.7	4.3	0.64	46	48

■ Square spacing based on 50% of diameter

▲ Triangular spacing based on 50% of diameter

Max radius reduction with adjustment screw is 25%

15/9 Strip Series 30° Spray Trajectory

Nozzle Pattern	Pressure PSI	Width x Length (ft)	Flow gpm	Precip.* in/hr	Flow gpm (2)	Metric		
						Pressure BAR	Radius m (1)	Flow m ³ /hr (2)
15EST	15	4 x 13	0.5	1.85	1.0	1.2 x 4.0	0.11	46
	20	4 x 14	0.5	1.72	1.4	1.2 x 4.3	0.11	43
	25	4 x 14	0.6	2.06	1.7	1.2 x 4.3	0.14	54
15CST	15	4 x 26	0.9	1.67	1.0	1.2 x 7.9	0.20	42
	20	4 x 28	1.0	1.72	1.4	1.2 x 8.5	0.23	45
	25	4 x 28	1.1	1.89	1.7	1.2 x 8.5	0.25	49
15SST	15	4 x 26	0.9	1.67	1.0	1.2 x 7.9	0.20	42
	20	4 x 28	1.0	1.72	1.4	1.2 x 8.5	0.23	45
	25	4 x 28	1.1	1.89	1.7	1.2 x 8.5	0.25	49
9SST	15	9 x 15	1.3	1.85	1.0	2.7 x 4.6	0.30	48
	20	9 x 16	1.5	2.01	1.4	2.7 x 4.9	0.34	51
	25	9 x 18	1.6	1.90	1.7	2.7 x 5.5	0.36	49

* Precipitation based on in-line, head-to-head spacing.

5 Stream Bubbler Series 0° Spray Trajectory

Nozzle Pattern	Pressure PSI	Radius ft (1)	Flow gpm (2)	Pressure BAR	Metric Radius m (1)	Flow m ³ /hr (2)
5FB	15	5	1.5	0	1.5	0.34
	20	5	1.5	1.4	1.5	0.34
	25	5	1.5	1.7	1.5	0.34
5HB	15	5	1.0	1.0	1.5	0.23
	20	5	1.0	1.4	1.5	0.23
	25	5	1.0	1.7	1.5	0.23
5QB	15	5	0.5	1.0	1.5	0.11
	20	5	0.5	1.4	1.5	0.11
	25	5	0.5	1.7	1.5	0.11
5CST-B	15	5	0.5	1.0	1.5	0.11
	20	5	0.5	1.4	1.5	0.11
	25	5	0.5	1.7	1.5	0.11

(1) Adjusted radius at pressure shown

(2) Flow with radius adjusted to 5 ft (1.5m)



FEATURES

- ◆ Easy grip-and-turn adjustment
- ◆ Exceptional uniform coverage
- ◆ Maintains matched precipitation rates between arcs within a radius
- ◆ Stainless steel radius adjustment screw
- ◆ Reusable, dual compartment resealable bags










APPLICATIONS

- ◆ For use with all MAX Series sprayheads
- ◆ Fits all industry-standard sprayheads with male thread risers

OPERATING DATA

- ◆ Precipitation rate: 1.18 - 5.74" per hour (30 - 146 mm/h)
- ◆ Pressure: 20 - 40 PSI (1.4 - 2.8 BAR)
- ◆ Flow range: 0.4 - 3.8 GPM (0.1 - 0.9 m³/hr)

MAX Adjustable Arc Nozzles																						
Arc	Pressure PSI	Nozzle 8A Trajectory: 0° Color Code: YELLOW				Nozzle 10A Trajectory: 5° Color Code: RED				Nozzle 12A Trajectory: 15° Color Code: GREEN				Nozzle 15A Trajectory: 30° Color Code: GREY				Nozzle 17A Trajectory: 30° Color Code: GREY				
		Radius ft	Flow gpm	Precip. ■	in/hr ▲	Radius ft	Flow gpm	Precip. ■	in/hr ▲	Radius ft	Flow gpm	Precip. ■	in/hr ▲	Radius ft	Flow gpm	Precip. ■	in/hr ▲	Radius ft	Flow gpm	Precip. ■	in/hr ▲	
	45°	20	8	0.57	6.86	7.92	10	0.59	4.54	5.25	12	0.50	2.67	3.09	15	0.51	1.75	2.02	16	0.41	1.23	1.42
		25	8	0.62	7.46	8.61	10	0.66	5.08	5.87	12	0.61	3.26	3.77	15	0.62	2.12	2.45	16	0.48	1.44	1.67
		30	8	0.68	8.18	9.45	10	0.74	5.70	6.58	12	0.64	3.42	3.95	15	0.72	2.46	2.85	16	0.53	1.59	1.84
		35	9	0.72	8.84	7.90	11	0.80	5.09	5.88	13	0.71	3.23	3.74	16	0.76	2.29	2.64	17	0.57	1.52	1.75
		40	9	0.78	7.41	8.56	11	0.86	5.47	6.32	13	0.72	3.28	3.79	16	0.79	2.38	2.74	17	0.61	1.63	1.88
	90°	20	8	0.82	4.93	5.70	10	0.93	3.58	4.13	12	0.75	2.01	2.32	15	0.82	1.40	1.62	16	0.84	1.26	1.46
		25	8	0.88	5.29	6.11	10	1.00	3.85	4.45	12	0.93	2.49	2.87	15	0.93	1.59	1.84	16	0.95	1.43	1.65
		30	8	0.97	5.84	6.74	10	1.11	4.27	4.93	12	1.00	2.67	3.09	15	1.04	1.78	2.05	16	1.03	1.55	1.79
		35	9	1.03	4.90	5.65	11	1.19	3.79	4.37	13	1.10	2.51	2.89	16	1.10	1.65	1.91	17	1.08	1.44	1.66
		40	9	1.13	5.37	6.20	11	1.27	4.04	4.67	13	1.16	2.64	3.05	16	1.20	1.80	2.08	17	1.14	1.52	1.75
	120°	20	8	0.90	4.06	4.69	10	1.10	3.18	3.67	12	0.87	1.74	2.01	15	1.10	1.41	1.63	16	1.02	1.15	1.33
		25	8	1.15	5.19	5.99	10	1.31	3.78	4.37	12	1.04	2.09	2.41	15	1.21	1.55	1.79	16	1.09	1.23	1.42
		30	8	1.25	5.64	6.51	10	1.41	4.07	4.70	12	1.13	2.27	2.62	15	1.33	1.71	1.97	16	1.19	1.34	1.55
		35	9	1.35	4.81	5.56	11	1.50	3.58	4.13	13	1.22	2.08	2.41	16	1.44	1.62	1.88	17	1.24	1.24	1.43
		40	9	1.41	5.03	5.80	11	1.60	3.82	4.41	13	1.32	2.26	2.60	16	1.50	1.69	1.95	17	1.34	1.34	1.55
	180°	20	8	1.35	4.06	4.69	10	1.45	2.79	3.22	12	1.21	1.62	1.87	15	1.42	1.21	1.40	16	1.36	1.02	1.18
		25	8	1.47	4.42	5.11	10	1.61	3.10	3.58	12	1.28	1.71	1.98	15	1.65	1.41	1.63	16	1.53	1.15	1.33
		30	8	1.61	4.84	5.59	10	1.78	3.43	3.96	12	1.59	2.13	2.45	15	1.75	1.50	1.73	16	1.68	1.26	1.46
		35	9	1.74	4.14	4.78	11	1.87	2.98	3.44	13	1.73	1.97	2.28	16	1.89	1.42	1.64	16	1.82	1.37	1.58
		40	9	1.83	4.35	5.02	11	2.02	3.21	3.71	13	1.87	2.13	2.46	16	2.06	1.55	1.79	16	1.95	1.47	1.69
	240°	20	8	1.73	3.90	4.51	10	1.90	2.74	3.17	12	1.46	1.46	1.69	15	1.55	0.99	1.15	16	1.62	0.91	1.05
		25	8	1.97	4.44	5.13	10	2.12	3.06	3.53	12	1.63	1.63	1.89	15	1.75	1.12	1.30	16	1.83	1.03	1.19
		30	8	2.20	4.96	5.73	10	2.30	3.32	3.83	12	1.80	1.80	2.08	15	1.91	1.23	1.42	16	2.04	1.15	1.33
		35	9	2.40	4.28	4.94	11	2.52	3.01	3.47	13	1.94	1.66	1.91	16	2.04	1.15	1.33	16	2.22	1.25	1.45
		40	9	2.56	4.56	5.27	11	2.67	3.19	3.68	13	2.14	1.83	2.11	16	2.15	1.21	1.40	16	2.37	1.34	1.54
	270°	20	8	1.87	3.75	4.33	10	2.00	2.57	2.96	12	1.54	1.37	1.58	15	2.02	1.15	1.33	16	1.96	0.98	1.13
		25	8	2.10	4.21	4.86	10	2.26	2.90	3.35	12	1.73	1.54	1.78	15	2.32	1.32	1.53	16	2.21	1.11	1.28
		30	8	2.26	4.53	5.23	10	2.47	3.17	3.66	12	1.93	1.72	1.99	15	2.51	1.43	1.65	16	2.47	1.24	1.43
		35	9	2.40	3.80	4.39	11	2.70	2.86	3.31	13	2.11	1.60	1.85	16	2.74	1.37	1.59	16	2.64	1.32	1.53
		40	9	2.63	4.17	4.81	11	2.98	3.16	3.65	13	2.30	1.75	2.02	16	2.97	1.49	1.72	16	2.80	1.40	1.62
	360°	20	8	2.21	3.32	3.84	10	2.31	2.22	2.57	12	1.67	1.12	1.29	15	2.38	1.02	1.18	16	2.53	0.95	1.10
		25	8	2.52	3.79	4.38	10	2.61	2.51	2.90	12	1.89	1.26	1.46	15	2.66	1.14	1.31	16	2.86	1.08	1.24
		30	8	2.84	4.27	4.93	10	2.87	2.76	3.19	12	2.11	1.41	1.63	15	2.96	1.27	1.46	16	3.30	1.24	1.43
		35	9	2.99	3.55	4.10	11	3.13	2.49	2.88	13	2.27	1.29	1.49	16	3.26	1.23	1.42	16	3.43	1.29	1.49
		40	9	3.20	3.80	4.39	11	3.37	2.68	3.10	13	2.44	1.39	1.60	16	3.46	1.30	1.50	16	3.83	1.44	1.61



8A



10A










12A



15A



17A

MAX Adjustable Arc Nozzles																						
Arc	Pressure BAR	Nozzle 8A Trajectory: 0° Color Code: YELLOW				Nozzle 10A Trajectory: 5° Color Code: RED				Nozzle 12A Trajectory: 15° Color Code: GREEN				Nozzle 15A Trajectory: 30° Color Code: GREY				Nozzle 17A Trajectory: 30° Color Code: GREY				
		Radius m	Flow m³/hr	Precip. ■	mm/hr ▲	Radius m	Flow m³/hr	Precip. ■	mm/hr ▲	Radius m	Flow m³/hr	Precip. ■	mm/hr ▲	Radius m	Flow m³/hr	Precip. ■	mm/hr ▲	Radius m	Flow m³/hr	Precip. ■	mm/hr ▲	
	45°	1.38	2.4	0.13	174	201	3.0	0.13	115	133	3.7	0.11	68	78	4.6	0.12	44	51	4.9	0.09	31	36
		1.72	2.4	0.14	189	219	3.0	0.15	129	149	3.7	0.14	83	96	4.6	0.14	54	62	4.9	0.11	37	42
		2.07	2.4	0.15	208	240	3.0	0.17	145	167	3.7	0.15	87	100	4.6	0.16	63	72	4.9	0.12	40	47
		2.41	2.7	0.16	174	201	3.4	0.18	129	149	4.0	0.16	82	95	4.9	0.17	58	67	5.2	0.13	39	45
		2.76	2.7	0.18	188	217	3.4	0.20	139	161	4.0	0.16	83	96	4.9	0.18	60	70	5.2	0.14	41	48
	90°	1.38	2.4	0.19	125	145	3.0	0.21	91	105	3.7	0.17	51	59	4.6	0.19	36	41	4.9	0.19	32	37
		1.72	2.4	0.20	134	155	3.0	0.23	98	113	3.7	0.21	63	73	4.6	0.21	40	47	4.9	0.22	36	42
		2.07	2.4	0.22	148	171	3.0	0.25	109	125	3.7	0.23	68	78	4.6	0.24	45	52	4.9	0.23	39	45
		2.41	2.7	0.23	124	144	3.4	0.27	96	111	4.0	0.25	64	73	4.9	0.25	42	49	5.2	0.25	37	42
		2.76	2.7	0.26	136	158	3.4	0.29	103	119	4.0	0.26	67	78	4.9	0.27	46	53	5.2	0.26	39	45
	120°	1.38	2.4	0.20	103	119	3.0	0.25	81	93	3.7	0.20	44	51	4.6	0.25	36	41	4.9	0.23	29	34
		1.72	2.4	0.26	132	152	3.0	0.30	96	111	3.7	0.24	53	61	4.6	0.27	39	46	4.9	0.25	31	36
		2.07	2.4	0.28	143	165	3.0	0.32	103	119	3.7	0.26	58	66	4.6	0.30	43	50	4.9	0.27	34	39
		2.41	2.7	0.31	122	141	3.4	0.34	91	105	4.0	0.28	53	61	4.9	0.33	41	48	5.2	0.28	31	36
		2.76	2.7	0.32	128	147	3.4	0.36	97	112	4.0	0.30	57	66	4.9	0.34	43	50	5.2	0.30	34	39
	180°	1.38	2.4	0.31	103	119	3.0	0.33	71	82	3.7	0.28	41	47	4.6	0.32	31	36	4.9	0.31	26	30
		1.72	2.4	0.33	112	130	3.0	0.37	79	91	3.7	0.29	43	50	4.6	0.37	36	41	4.9	0.35	29	34
		2.07	2.4	0.37	123	142	3.0	0.40	87	101	3.7	0.36	54	62	4.6	0.40	38	44	4.9	0.38	32	37
		2.41	2.7	0.40	105	121	3.4	0.42	76	87	4.0	0.39	50	58	4.9	0.43	36	42	4.9	0.41	35	40
		2.76	2.7	0.42	110	128	3.4	0.46	82	94	4.0	0.42	54	62	4.9	0.47	39	45	4.9	0.44	37	43
	240°	1.38	2.4	0.39	99	114	3.0	0.43	70	80	3.7	0.33	37	43	4.6	0.35	25	29	4.9	0.37	23	27
		1.72	2.4	0.45	113	130	3.0	0.48	78	90	3.7	0.37	42	48	4.6	0.40	29	33	4.9	0.42	26	30
		2.07	2.4	0.50	126	146	3.0	0.52	84	97	3.7	0.41	46	53	4.6	0.43	31	36	4.9	0.46	29	34
		2.41	2.7	0.55	109	125	3.4	0.57	76	88	4.0	0.44	42	49	4.9	0.46	29	34	4.9	0.50	32	37
		2.76	2.7	0.58	116	134	3.4	0.61	81	93	4.0	0.49	46	54	4.9	0.49	31	36	4.9	0.54	34	39
	270°	1.38	2.4	0.42	95	110	3.0	0.45	65	75	3.7	0.35	35	40	4.6	0.46	29	34	4.9	0.45	25	29
		1.72	2.4	0.48	107	124	3.0	0.51	74	85	3.7	0.39	39	45	4.6	0.53	34	39	4.9	0.50	28	32
		2.07	2.4	0.51	115	133	3.0	0.56	81	93	3.7	0.44	44	50	4.6	0.57	36	42	4.9	0.56	31	36
		2.41	2.7	0.55	97	112	3.4	0.61	73	84	4.0	0.48	41	47	4.9	0.62	35	40	4.9	0.60	34	39
		2.76	2.7	0.60	106	122	3.4	0.68	80	93	4.0	0.52	44	51	4.9	0.67	38	44	4.9	0.64	36	41
	360°	1.38	2.4	0.50	84	97	3.0	0.52	56	65	3.7	0.38	28	33	4.6	0.54	26	30	4.9	0.57	24	28
		1.72	2.4	0.57	96	111	3.0	0.59	64	74	3.7	0.43	32	37	4.6	0.60	29	33	4.9	0.65	27	32
		2.07	2.4	0.65	108	125	3.0	0.65	70	81	3.7	0.48	36	41	4.6	0.67	32	37	4.9	0.75	32	36
		2.41	2.7	0.68	90	104	3.4	0.71	63	73	4.0	0.52	33	38	4.9	0.74	31	36	4.9	0.78	33	38
		2.76	2.7	0.73	97	112	3.4	0.77	68	79	4.0	0.55	35	41	4.9	0.79	33	38	4.9	0.87	37	42



FULL Circle



PART Circle



PART Circle with included filter

FEATURES

- ◆ Milled brass design provides best available uniform precipitation
- ◆ Arcs and angles for any landscape requirement
- ◆ Maintains matched precipitation rates between arcs within a radius














APPLICATIONS

- ◆ Projects that require nothing but the very best
- ◆ For use with all LX Series sprayheads
- ◆ Fits all industry-standard sprayheads with male thread risers

OPERATING DATA

- ◆ Low minimum operating pressure of 20 PSI (1.4 BAR)
- ◆ Flow range: 0.3 - 7.5 GPM (0.1 - 1.7 m³/hr)
- ◆ Precipitation rate: 0.79 - 3.45
- ◆ B3 nozzles are compatible with most micro-irrigation application rates

30° and Low Angle 15° Trajectory / Matched Precipitation																															
Max Spacing			B3 3 - 5 Feet				B10 10 Feet				B12 12 Feet				B15 15 Feet				B18 18 Feet				B20 20 Feet				B24 24 Feet				
Arc	Model	PSI	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	gpm	radius	Precip. ■	in/hr ▲	
360° 	F	20									1.7	9	2.02	2.33	2.4	11	2.40	1.91	3.4	12	2.27	2.62	4.2	13	2.39	2.76	6.2	16	2.33	2.69	
		25									1.9	9	2.26	2.61	2.7	12	2.70	1.80	3.8	13	2.16	2.50	4.8	14	2.36	2.72	6.8	17	2.26	2.62	
		30									2.1	11	1.67	1.93	3.0	12	3.00	2.01	4.2	13	2.39	2.76	5.3	15	2.27	2.62	7.5	18	2.23	2.57	
180° 	H	20	0.3	5	2.31	2.67	0.6	8	1.80	2.08	1.0	9	2.38	2.74	1.4	11	1.40	2.23	2.0	12	2.67	3.09	2.4	13	2.73	3.16	3.3	16	2.48	2.87	
		25	0.3	6	1.60	1.85	0.7	8	2.11	2.43	1.1	9	2.61	3.02	1.6	12	1.60	2.14	2.3	13	2.62	3.03	2.7	14	2.65	3.06	3.5	17	2.33	2.69	
		30	0.3	7	1.18	1.36	0.7	9	1.66	1.92	1.2	11	1.91	2.20	1.8	12	1.80	2.41	2.5	13	2.85	3.29	2.9	15	2.48	2.87	4.0	18	2.38	2.74	
90° 	Q	20	0.3	5	4.62	5.33	0.3	8	1.80	2.08	0.5	9	2.38	2.74	0.7	11	0.70	2.23	1.0	12	2.67	3.09	1.2	13	2.73	3.16	1.8	16	2.71	3.13	
		25	0.3	6	3.21	3.70	0.4	8	2.41	2.78	0.6	9	2.85	3.29	0.8	12	0.80	2.14	1.1	13	2.51	2.89	1.4	14	2.75	3.18	1.9	17	2.53	2.92	
		30	0.3	7	2.36	2.72	0.4	9	1.90	2.20	0.7	11	2.23	2.57	0.9	12	0.90	2.41	1.2	13	2.73	3.16	1.5	15	2.57	2.96	2.1	18	2.50	2.88	
120° 	T	20	0.3	5	3.47	4.00	0.4	8	1.80	2.08	0.7	9	2.50	2.88	1.0	11	1.00	2.39	1.3	12	2.61	3.01	1.6	13	2.73	3.16	2.2	16	2.48	2.87	
		25	0.3	6	2.41	2.78	0.5	8	2.26	2.60	0.7	9	2.50	2.88	1.1	12	1.10	2.21	1.4	13	2.39	2.76	1.8	14	2.65	3.06	2.4	17	2.40	2.77	
		30	0.3	7	1.77	2.04	0.6	9	2.14	2.47	0.8	11	1.91	2.20	1.2	12	1.20	2.41	1.6	13	2.73	3.16	2.0	15	2.57	2.96	2.7	18	2.41	2.78	
240° 	TT	20					0.8	8	1.80	2.08	1.3	9	2.32	2.68	2.2	11	2.20	2.63	2.7	12	2.71	3.13	3.3	13	2.82	3.26	4.6	16	2.59	3.00	
		25					0.9	8	2.03	2.34	1.5	9	2.67	3.09	2.4	12	2.40	2.41	3.2	13	2.73	3.16	3.7	14	2.73	3.15	5.2	17	2.60	3.00	
		30					1.0	9	1.78	2.06	1.7	11	2.03	2.34	2.6	12	2.60	2.61	3.5	13	2.99	3.45	4.1	15	2.63	3.04	5.7	18	2.54	2.93	
270° 	TQ	20	0.3	5	1.54	1.78	0.9	8	1.80	2.08	1.4	9	2.22	2.56	2.4	11	2.40	2.55	3.1	12	2.76	3.19	3.8	13	2.89	3.33	5.2	16	2.61	3.01	
		25	0.3	6	1.07	1.23	1.0	8	2.01	2.32	1.6	9	2.53	2.93	2.6	12	2.60	2.32	3.5	13	2.66	3.07	4.3	14	2.82	3.25	5.5	17	2.44	2.82	
		30	0.3	7	0.79	0.91	1.1	9	1.74	2.01	1.8	11	1.91	2.20	2.9	12	2.90	2.58	3.8	13	2.89	3.33	4.7	15	2.68	3.10	6.1	18	2.42	2.79	
105° 	105	20													0.8	11	0.80	2.18	1.1	12	2.52	2.91	1.4	13	2.73	3.16					
		25													1.0	12	1.00	2.29	1.3	13	2.54	2.93	1.6	14	2.69	3.11					
		30													1.1	12	1.10	2.52	1.5	13	2.93	3.38	1.8	15	2.64	3.05					
135° 	135	20	0.3	5	3.08	3.56	0.5	8	2.01	2.32	0.7	9	2.22	2.56	1.0	11	1.00	2.12	1.5	12	2.67	3.09	1.8	13	2.73	3.16	2.5	16	2.51	2.89	
		25	0.3	6	2.14	2.47	0.6	8	2.41	2.78	0.8	9	2.53	2.93	1.2	12	1.20	2.14	1.7	13	2.58	2.98	2.1	14	2.75	3.18	2.9	17	2.58	2.97	
		30	0.3	7	1.57	1.81	0.6	9	1.90	2.20	0.9	11	1.91	2.20	1.4	12	1.40	2.50	1.9	13	2.89	3.33	2.3	15	2.62	3.03	3.2	18	2.53	2.93	
165° 	165	20													1.3	11	1.30	2.26	1.8	12	2.63	3.03	2.3	13	2.86	3.30					
		25													1.5	12	1.50	2.19	1.9	13	2.36	2.73	2.6	14	2.79	3.22					
		30													1.7	12	1.70	2.48	2.3	13	2.86	3.30	2.9	15	2.71	3.13					
195° 	195	20									1.0	9	2.19	2.53	1.5	11	1.50	2.20	2.2	12	2.71	3.13	2.8	13	2.94	3.40	3.9	16	2.71	3.13	
		25										1.1	9	2.41	2.79	1.7	12	1.70	2.10	2.5	13	2.63	3.04	3.2	14	2.90	3.35	4.4	17	2.71	3.12
		30										1.3	11	1.91	2.20	1.9	12	1.90	2.34	2.8	13	2.94	3.40	3.5	15	2.76	3.19	4.9	18	2.69	3.10
225° 	225	20					0.7	8	1.68	1.95	1.3	9	2.47	2.85	2.0	11	2.00	2.55	2.5	12	2.67	3.09	3.0	13	2.73	3.16	4.3	16	2.59	2.99	
		25						0.9	8	2.17	2.50	1.4	9	2.66	3.07	2.3	12	2.30	2.46	2.9	13	2.64	3.05	3.4	14	2.67	3.08	4.9	17	2.61	3.02
		30						0.9	9	1.71	1.98	1.6	11	2.04	2.35	2.6	12	2.60	2.78	3.2	13	2.92	3.37	3.8	15	2.60	3.00	5.4	18	2.57	2.96












Brass Nozzle
Shrub Adapters



NO. 72
1/2" Copper



NO. 73
1/2" IPS

30° and Low Angle 15° Trajectory / Matched Precipitation																														
Max Spacing			B3 0.9 - 1.5 m				B10 3.0 m				B12 3.6 m				B15 4.4 m				B18 5.4 m				B20 6.0 m				B24 7.2 m			
Arc	Model	PSI	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲	gpm	radius	Precip. ■	mm/hr ▲
360°		1.4									0.39	2.7	51	59	0.55	3.3	48	56	0.77	3.6	58	67	0.95	3.9	61	70	1.34	4.8	59	68
		1.7									0.43	2.7	57	66	0.61	3.6	46	53	0.86	3.9	55	63	1.09	4.2	60	69	1.41	5.1	58	66
		2.1									0.48	2.7	42	49	0.68	3.6	51	59	0.95	3.9	61	70	1.20	4.5	58	66	1.59	5.4	57	65
180°		1.4	0.07	1.5	59	68	0.14	2.4	46	53	0.23	2.7	60	70	0.32	3.3	57	65	0.45	3.6	68	78	0.55	3.9	69	80	0.75	4.8	63	73
		1.7	0.07	1.8	41	47	0.16	2.4	53	62	0.25	2.7	66	77	0.36	3.6	54	63	0.52	3.9	67	77	0.61	4.2	67	78	0.79	5.1	59	68
		2.1	0.07	2.1	30	35	0.16	2.7	42	49	0.27	3.3	48	56	0.41	3.6	61	71	0.57	3.9	72	84	0.66	4.5	63	73	0.91	5.4	60	70
90°		1.4	0.07	1.5	117	136	0.07	2.4	46	53	0.11	2.7	60	70	0.16	3.3	57	65	0.23	3.6	68	78	0.27	3.9	69	80	0.41	4.8	69	79
		1.7	0.07	1.8	81	94	0.09	2.4	61	71	0.14	2.7	72	84	0.18	3.6	54	63	0.25	3.9	64	73	0.32	4.2	70	81	0.43	5.1	64	74
		2.1	0.07	2.1	60	69	0.09	2.7	48	56	0.16	3.3	57	65	0.20	3.6	61	71	0.27	3.9	69	80	0.34	4.5	65	75	0.48	5.4	63	73
120°		1.4	0.07	1.5	88	102	0.09	2.4	46	53	0.16	2.7	63	73	0.23	3.3	61	70	0.30	3.6	66	76	0.36	3.9	69	80	0.50	4.8	63	73
		1.7	0.07	1.8	61	71	0.11	2.4	57	66	0.16	2.7	63	73	0.25	3.6	56	65	0.32	3.9	61	70	0.41	4.2	67	78	0.55	5.1	61	70
		2.1	0.07	2.1	45	52	0.14	2.7	54	63	0.18	3.3	48	56	0.27	3.6	61	71	0.36	3.9	69	80	0.45	4.5	65	75	0.61	5.4	61	71
240°		1.4					0.18	2.4	46	53	0.30	2.7	59	68	0.50	3.3	67	77	0.61	3.6	69	79	0.75	3.9	72	83	1.04	4.8	66	76
		1.7					0.20	2.4	52	60	0.34	2.7	68	78	0.55	3.6	61	71	0.73	3.9	69	80	0.84	4.2	69	80	1.18	5.1	66	76
		2.1					0.23	2.7	45	52	0.39	3.3	52	59	0.59	3.6	66	76	0.79	3.9	76	88	0.93	4.5	67	77	1.29	5.4	65	74
270°		1.4			39	45	0.20	2.4	46	53	0.32	2.7	56	65	0.55	3.3	65	75	0.70	3.6	70	81	0.86	3.9	73	85	1.18	4.8	66	76
		1.7			27	31	0.23	2.4	51	59	0.36	2.7	64	74	0.59	3.6	59	68	0.79	3.9	68	78	0.98	4.2	72	83	1.25	5.1	62	72
		2.1			20	23	0.25	2.7	44	51	0.41	3.3	48	56	0.66	3.6	66	76	0.86	3.9	73	85	1.07	4.5	68	79	1.39	5.4	61	71
105°		1.4													0.18	3.3	55	64	0.25	3.6	64	74	0.32	3.9	69	80				
		1.7													0.23	3.6	58	67	0.30	3.9	64	74	0.36	4.2	68	79				
		2.1													0.25	3.6	64	74	0.34	3.9	74	86	0.41	4.5	67	77				
135°		1.4	0.07	1.5	78	90	0.11	2.4	51	59	0.16	2.7	56	65	0.25	3.3	54	62	0.34	3.6	68	78	0.41	3.9	69	80	0.57	4.8	64	74
		1.7	0.07	1.8	54	63	0.14	2.4	61	71	0.18	2.7	64	74	0.27	3.6	54	63	0.39	3.9	66	76	0.48	4.2	70	81	0.66	5.1	65	76
		2.1	0.07	2.1	40	46	0.14	2.7	48	56	0.20	3.3	48	56	0.32	3.6	63	73	0.43	3.9	73	85	0.52	4.5	67	77	0.73	5.4	64	74
165°		1.4													0.30	3.3	57	66	0.41	3.6	67	77	0.52	3.9	73	84				
		1.7													0.34	3.6	56	64	0.43	3.9	60	69	0.59	4.2	71	82				
		2.1													0.39	3.6	63	73	0.52	3.9	73	84	0.66	4.5	69	79				
195°		1.4									0.23	2.7	56	64	0.34	3.3	56	65	0.50	3.6	69	80	0.64	3.9	75	86	0.89	4.8	69	79
		1.7									0.25	2.7	61	71	0.39	3.6	53	62	0.57	3.9	67	77	0.73	4.2	74	85	1.00	5.1	69	79
		2.1									0.30	3.3	48	56	0.43	3.6	60	69	0.64	3.9	75	86	0.79	4.5	70	81	1.11	5.4	68	79
225°		1.4					0.16	2.4	43	49	0.30	2.7	63	72	0.45	3.3	65	75	0.57	3.6	68	78	0.68	3.9	69	80	0.98	4.8	66	76
		1.7					0.20	2.4	55	64	0.32	2.7	68	78	0.52	3.6	62	72	0.66	3.9	67	78	0.77	4.2	68	78	1.11	5.1	66	77
		2.1					0.20	2.7	43	50	0.36	3.3	52	60	0.59	3.6	71	82	0.73	3.9	74	86	0.86	4.5	66	76	1.23	5.4	65	75



B Series Strip Nozzles

B Series Strip Nozzles											
						METRIC					
Arc	PSI	B10		B15			BAR	B10		B15	
		gpm	W + L (ft)	gpm	W + L (ft)			m³/hr	W + L (m)	m³/hr	W + L (m)
EST	20	.3	4 x 8	.6	4 x 11		1.4	0.07	1.2 x 2.4	0.14	1.2 x 3.4
	25	.4	4 x 9	.7	4 x 12		1.7	0.09	1.2 x 2.7	0.16	1.2 x 3.7
	30	.5	4 x 10	.8	4 x 13		2.1	0.11	1.2 x 3.0	0.18	1.2 x 4.0
CST	20	.7	4 x 16	1.4	4 x 22		1.4	0.16	1.2 x 4.8	0.32	1.2 x 6.7
	25	.8	4 x 18	1.6	4 x 24		1.7	0.18	1.2 x 5.5	0.36	1.2 x 6.9
	30	.9	4 x 20	1.8	4 x 26		2.1	0.20	1.2 x 6.1	0.41	1.2 x 7.9
SST	20	.7	4 x 16	1.4	4 x 22		1.4	0.16	1.2 x 4.8	0.32	1.2 x 6.7
	25	.8	4 x 18	1.6	4 x 24		1.7	0.18	1.2 x 5.5	0.36	1.2 x 6.9
	30	.9	4 x 20	1.8	4 x 26		2.1	0.20	1.2 x 6.1	0.41	1.2 x 7.9

100Series



FEATURES

- ◆ 100 Series shrub nozzles performance is identical to B Series brass nozzles.
- ◆ “Effective Radius” (see footnote 3) is provided to illustrate the excellent distribution profile of the nozzle series. Minor difference between “ER” and radius demonstrates the slope of distribution at the outer limits of coverage. This eliminates the requirement of “head-to-head” spacing.
- ◆ Fits No. 92 and 93 shrub adapters.



NO. 92 SHRUB ADAPTER

- ◆ Solder connection adapts all 100 Series part circle shrub nozzles to 1/2" copper tube risers



NO. 93 SHRUB ADAPTER

- ◆ Adapts all 100 Series part circle shrub nozzles to 1/2" IPS risers





NO. 901 SHRUB RISER EXTENSION

3" (7.6 cm) length





Fits 100 Series Nozzles and No. 92 and 93 adapters



Standard 10° Low Angle Spray Trajectory / Matched Precipitation

Nozzle		3 - 5' Spacing (varies with application)				10' Max Spacing 1				12' Max Spacing 1				15' Max Spacing 1				18' Max Spacing 1				20' Max Spacing 1			
		Arc	PSI	No.	gpm	radius	ER 3	No.	gpm	radius 2	ER 3	No.	gpm	radius 2	ER 3	No.	gpm	radius 2	ER 3	No.	gpm	radius 2	ER 3		
	20	100H	.3	5	4	110H	.6	8	7	112H	1.0	9	8	115H	1.4	11	10	118H	2.0	12	11	120H	2.4	13	12
	25		.3	6	5		.7	8	7		1.1	9	8		1.6	12	10		2.3	13	12		2.7	14	13
	30		.3	7	5		.7	9	8		1.2	11	9		1.8	12	11		2.5	13	12		2.9	15	14
90°	20	100Q	.3	5	4	110Q	.3	8	7	112Q	.5	9	8	115Q	.7	11	10	118Q	1.0	12	11	120Q	1.2	13	12
	25		.3	6	5		.4	8	7		.6	9	8		.8	12	10		1.1	13	12		1.4	14	13
	30		.3	7	5		.4	9	8		.7	11	9		.9	12	11		1.2	13	12		1.5	15	14
	120°	20	100A	.3	5	4								115A	1.0	11	10					120A	1.6	13	12
	25		.3	6	5										1.1	12	10						1.8	14	13
	30		.3	7	5										1.2	12	11						2.0	15	14
	240°	20	100E	.3	5	4	110E	.9	8	7	112E	1.4	9	8				118E	3.1	12	11	120E	3.8	13	12
	25		.3	6	5		1.0	8	7		1.6	9	8						3.5	13	12		4.3	14	13
	30		.3	7	5		1.1	9	8		1.8	11	9						3.8	13	12		4.7	15	14

Metric

Nozzle Arc PSI	0.9 - 1.5m Spacing (varies with application)				3.0m Max Spacing 1				3.6m Max Spacing 1				4.4m Max Spacing 1				5.4m Max Spacing 1				6.0m Max Spacing 1				
	No.	m ³ /hr	radius	ER 3	No.	m ³ /hr	radius 2	ER 3	No.	m ³ /hr	radius 2	ER 3	No.	m ³ /hr	radius 2	ER 3	No.	m ³ /hr	radius 2	ER 3	No.	m ³ /hr	radius 2	ER 3	
 180°	1.4	100H	0.07	1.5	1.2	110H	0.14	2.4	2.1	112H	0.23	2.7	2.4	115H	0.32	3.3	3.0	118H	0.45	3.6	3.3	120H	0.55	3.9	3.6
	1.7		0.07	1.8	1.5		0.16	2.4	2.1		0.25	2.7	2.4		0.36	3.6	3.0		0.52	3.9	3.6		0.61	4.2	3.9
	2.1		0.07	2.1	1.5		0.16	2.7	2.4		0.27	3.3	2.7		0.41	3.6	3.3		0.57	3.9	3.6		0.66	4.5	4.2
 90°	1.4	100Q	0.07	1.5	1.2	110Q	0.07	2.4	2.1	112Q	0.11	2.7	2.4	115Q	0.16	3.3	3.0	118Q	0.23	3.6	3.3	120Q	0.27	3.9	3.6
	1.7		0.07	1.8	1.5		0.09	2.4	2.1		0.14	2.7	2.4		0.18	3.6	3.0		0.25	3.9	3.6		0.32	4.2	3.9
	2.1		0.07	2.1	1.5		0.09	2.7	2.4		0.16	3.3	2.7		0.20	3.6	3.3		0.27	3.9	3.6		0.34	4.5	4.2
 120°	1.4	100A	0.07	1.5	1.2								115A	0.23	3.3	3.0					120A	0.36	3.9	3.6	
	1.7		0.07	1.8	1.5									0.25	3.6	3.0						0.41	4.2	3.9	
	2.1		0.07	2.1	1.5									0.27	3.6	3.3						0.45	4.5	4.2	
 240°	1.4	100E	0.07	1.5	1.2	110E	0.20	2.4	2.1	112E	0.32	2.7	2.4				118E	0.70	3.6	3.3	120E	0.86	3.9	3.6	
	1.7		0.07	1.8	1.5		0.23	2.4	2.1		0.36	2.7	2.4					0.79	3.9	3.6		0.98	4.2	3.9	
	2.1		0.07	2.1	1.5		0.25	2.7	2.4		0.41	3.3	2.7					0.86	3.9	3.6		1.07	4.5	4.2	

- 1 Maximum triangular spacing. Climate, wind and nozzle performance should be considered for design spacing. Example: many designers de-rate spacing by using 90% of maximum for average site conditions.
- 2 Listed radius determined by ASAE industry standard measurement of .01" (0.3 mm) per hour. Nozzle mounted on 12" (30 cm) riser.

- 3 ER "Effective Radius" indicates the most distant point at which .25" (6 mm) per hour precipitation will occur within the area of coverage.
 - For full circle shrub heads, specify B Series nozzles.
 - Precipitation: 1.2" (31 mm) per hour for half circle / 20 PSI (1.4 BAR) / maximum spacing.

Bubblers & Bed Sprays



**NO. 106
PRESSURE
COMPENSATING BUBBLER**

NO. 106 SERIES

No. 106 provides a soft, bubbling action for deep soaking. Ideal for planter boxes, tree wells or similar areas when proper drainage is available.

FEATURES

- ◆ Pressure compensating bubbler with trickle pattern
- ◆ Inlet filter screen to prevent clogging
- ◆ Durable engineering-grade plastic construction
- ◆ Available in ½ GPM and 1 GPM discharge models
- ◆ Application for tree wells and bed areas

CONSTRUCTION

- ◆ Durable ABS plastic housing. Pressure compensating device is made of long life Buna-N rubber
- ◆ (½" IPS connection)

OPERATING RANGE

Flow:	.5 – 1.0 GPM	1.9 – 3.8 lpm
Spacing:	1 – 3'	0.3 – 0.9 m
Pressure:	15 – 45 PSI	1.1 – 3.2 Kg/cm2

Pressure Compensating Bubbler Specification	
Model	Description
106-50	.5 GPM
106-100	1.0 GPM



**NO. 102 & 133
ADJUSTABLE
BUBBLERS**

NO. 102 & 133 SERIES

No. 102 and 133 are the perfect choice for all applications where economy and/or higher flows are required. Ideal for planter boxes, tree wells or similar areas when proper drainage is available.

FEATURES

- ◆ Umbrella pattern, full circle bubbler
- ◆ Durable engineering-grade plastic construction
- ◆ Inlet filter screen to prevent clogging
- ◆ Application for free wells and bed areas

CONSTRUCTION

- ◆ Durable ABS plastic housing with stainless steel adjustment screw
- ◆ (½" IPS connection)

OPERATING RANGE

Flow:	1.1 – 2.3 gpm	0.25 – 0.52 m³/hr
Spacing:	1 – 3'	0.3 – 0.9 m
Pressure:	10 – 60 PSI	1.1 – 4.2 BAR

Adjustable Bubbler Specification	
Model	Description
102	Screwdriver adjustment
103	Knob adjustment

No. 102 & 133 Performance Data					
Pressure		Flow			
PSI	kg/cm²	Min* gpm	Min* lpm	Max gpm	Max lpm
20	1.4	1.3	4.9	3.0	11.4
30	2.2	1.6	6.1	4.0	15.1
45	3.2	2.0	7.6	4.5	17.0

* Flow rate for factory adjusted setting.



**NO. 105
BED SPRAY NOZZLE**

FEATURES

- ◆ The No. 105 provides a fixed, horizontal (flat) spray
- ◆ Full circle only
- ◆ This head is ideally suited for smaller, special treatment areas
- ◆ Fits No. 92 and 93 shrub adapters
- ◆ Note: diameter of coverage is based on head mounted 6" (15 cm) above grade

No. 105 Bed Spray Nozzle							
Nozzle	Type	PSI	Dia. (ft.)	gpm	BAR	Metric Dia. (m)	m³/hr
●	Full	10	11	0.9	0.70	3.3	0.20
●	Full	15	13	1.1	1.00	3.9	0.25
●	Full	18	14	1.2	1.25	4.2	0.27

T3Turbo



T3

T3SS

T3S



T3 Nozzles

T3 Turbo Specifications

Model	Type
T3	Adjustable arc
T3-36	Full circle
T3S	Adjustable arc shrub rotor
T3SS	Stainless steel full circle
T3-36SS	Stainless steel pop-up full circle

T3/T3S Operating Range

Precipitation Rate	Approx. 0.4 - 0.6" per hour @ 50 PSI	Metric 10 - 15 mm per hour @ 3.5 BAR
Radius	23 - 61'	7.0 - 18.6 m
Pressure	20 - 70 PSI	1.4 - 4.8 BAR
Flow	0.5 - 14.9 gpm	0.11 - 3.39 m ³ /hr



FEATURES

- ◆ 5 year warranty and 100% water tested
- ◆ Thick, vandal resistant rubber cover is standard; visible arrows indicate + or - arc adjustment
- ◆ Radius adjustment screw decreases radius up to 25%
- ◆ "Punch-thru" cover to protect nozzle retaining screw from debris
- ◆ Easy-grip threaded cover
- ◆ 14 field-changeable nozzles - SmartAngle (low angle) and Flow+ included
- ◆ Safety clutch for vandal protection; ratchets like a sprayhead
- ◆ Part circle models adjust from 40 - 360°; no tools required
- ◆ Expanded "arc dwell" on part circle models provides full coverage along borders
- ◆ Pressure activated wiper seal and strong stainless steel spring on pop-up models to ensure positive retraction
- ◆ High-tech micro filter protects reversing mechanism
- ◆ Streamlined large flow tube to minimize pressure loss through sprinkler
- ◆ Impeller flow regulator automatically matches rotation to nozzle selection
- ◆ Smooth impeller gear drive for highly uniform watering
- ◆ Large area, basket type, removable strainer for debris protection
- ◆ Standard Ready Check™ check valve on T3 and T35 models is easily reversed in the field to a "check" position. Check valve holds back 12' (3.7 m/hd) of elevated water.

CONSTRUCTION

- ◆ High-strength non-corrosive plastics and metals used throughout sprinkler
- ◆ Sealed, lubricant packed drive housing provides long life performance
- ◆ Options (factory installed)
- ◆ Non-potable cover (add "N" suffix)
- ◆ Vandal cover lock (add "XV" prefix)
- ◆ Check valve in "check" position (add "CV" prefix)

ACCESSORIES

T3ST Nozzle install collar

T3 DIMENSIONS

Height (closed): 7 ⁵/₈" (19.4 cm)

Pop-up Height: 4" (10.2 cm)

Inlet: ³/₄" IPS

T3S SHRUB DIMENSIONS

Height 8 ³/₁₆" (20.8 cm) Inlet: ³/₄" IPS



T35 DIMENSIONS

Height (closed): 8 ¹³/₁₆" (22.4 cm)

Pop-up Height: 4" (10.2 cm)

Inlet: 1" IPS

T3 / T35 Performance

Nozzle	Pressure PSI	Radius ft.	Flow gpm	Precip. in/hr ■	Precip. in/hr ▲	Pressure BAR	Radius m	Flow m ³ /hr	Precip. mm/hr ■	Precip. mm/hr ▲
Standard Angle 26° Trajectory										
1	30	28	0.7	0.17	0.20	2.1	8.5	0.16	4	5
	40	32	0.8	0.15	0.17	2.8	9.8	0.18	4	4
	50	33	0.9	0.16	0.18	3.4	10.1	0.20	4	5
	60	33	1.0	0.18	0.20	4.1	10.1	0.23	4	5
1.5	30	31	1.0	0.20	0.23	2.1	9.4	0.23	5	6
	40	35	1.4	0.19	0.22	2.8	10.7	0.27	5	6
	50	36	1.6	0.24	0.27	3.4	11.0	0.36	6	7
	60	36	1.8	0.27	0.31	4.1	11.0	0.41	7	8
2	30	28	1.2	0.29	0.34	2.1	8.5	0.27	7	9
	40	35	1.4	0.22	0.25	2.8	10.7	0.32	6	6
	50	35	1.9	0.30	0.34	3.4	10.7	0.43	8	9
	60	35	2.3	0.36	0.42	4.1	10.7	0.52	9	11
3	30	30	1.7	0.36	0.42	2.1	9.1	0.39	9	11
	40	38	2.0	0.27	0.31	2.8	11.6	0.45	7	8
	50	39	2.4	0.30	0.35	3.4	11.9	0.55	8	9
	60	41	2.8	0.32	0.37	4.1	12.6	0.64	8	9
3.5	40	41	3.5	0.40	0.46	2.8	12.5	0.79	10	12
	50	42	3.7	0.40	0.47	3.4	12.8	0.84	10	12
	60	43	4.3	0.45	0.52	4.1	13.1	0.98	11	13
	40	44	4.0	0.40	0.46	2.8	13.4	0.91	10	12
4	50	45	4.3	0.41	0.47	3.4	13.7	0.98	10	12
	60	46	5.0	0.45	0.53	4.1	14.0	1.14	11	13
6	40	45	5.5	0.52	0.60	2.8	13.7	1.25	13	15
	50	46	6.3	0.57	0.66	3.4	14.0	1.43	15	17
	60	47	6.9	0.60	0.69	4.1	14.3	1.57	15	18
	40	45	6.3	0.60	0.69	2.8	13.7	1.43	15	18
8	50	47	7.5	0.65	0.75	3.4	14.3	1.70	17	19
	60	51	8.1	0.60	0.69	4.1	15.5	1.84	15	18
SmartAngle 13° Low angle Trajectory										
2.0LA	30	29	1.6	0.37	0.42	2.1	8.8	0.36	9	11
	40	33	1.9	0.34	0.39	2.8	10.1	0.43	9	10
	50	34	2.1	0.35	0.40	3.4	10.4	0.48	9	10
2.5LA	30	31	2.1	0.42	0.49	2.1	9.4	0.48	11	12
	40	35	2.6	0.41	0.47	2.8	10.7	0.59	10	12
	50	36	2.9	0.43	0.50	3.4	11.0	0.66	11	13
3.5LA	30	31	2.7	0.54	0.62	2.1	9.4	0.61	14	16
	40	35	3.2	0.50	0.58	2.8	10.7	0.73	13	15
	50	37	3.5	0.49	0.57	3.4	11.3	0.79	13	14
4.5LA	30	33	3.0	0.53	0.61	2.1	10.1	0.68	13	16
	40	37	3.4	0.48	0.55	2.8	11.3	0.77	12	14
	50	37	4.1	0.58	0.67	3.4	11.3	0.93	15	17
Flow+ Nozzles 26° Trajectory										
9	50	50	9.5	0.73	0.84	3.4	15.2	2.16	19	21
	60	54	10.8	0.71	0.82	4.1	16.5	2.45	18	21
	70	55	11.7	0.74	0.86	4.8	16.8	2.66	19	22
13	50	57	12.4	0.73	0.85	3.4	17.4	2.82	19	22
	60	59	13.8	0.76	0.88	4.1	18.0	3.13	19	22
	70	61	14.9	0.77	0.89	4.8	18.6	3.38	20	23

■ Square spacing based on 50% of diameter

▲ Triangular spacing based on 50% of diameter

Note: All precipitation rates are calculated for 180° operation.

Divide by 2 for full circle precipitation rates

T35 Turbo Specifications

Model	Type	International Model
T35	Pop-up adjustable arc	T35-ISO
T35-36	Pop-up full circle	T35-36-ISO
T35-SS	Stainless steel pop-up adj. arc	T35-SS-ISO
T35-36SS	Stainless steel pop-up full circle	T35-36SS-ISO



CT70

FEATURES

- ◆ 5 year trade warranty and 100% water tested
- ◆ Thick, vandal resistant rubber cover is standard; visible arrows indicate
- ◆ + or - arc adjustment
- ◆ Radius adjustment screw decreases radius up to 25%
- ◆ "Punch-thru" cover to protect nozzle retaining screw from debris
- ◆ Easy grip threaded cover
- ◆ 5 field changeable nozzles
- ◆ Safety clutch for vandal protection; ratchets like a sprayhead
- ◆ Part circle models adjust from 40 - 360°; no tools required
- ◆ Expanded "arc dwell" on part circle models provides full coverage along borders
- ◆ Pressure activated wiper seal and strong stainless steel spring on pop-up models to ensure positive retraction
- ◆ High-tech micro filter protects reversing mechanism
- ◆ Streamlined large flow tube to minimize pressure loss through sprinkler
- ◆ Impeller flow regulator automatically matches flow to nozzle selection
- ◆ Smooth impeller gear drive for highly uniform watering
- ◆ Large area, basket type, removable strainer for debris protection
- ◆ Standard Ready Check™ check valve on CT70 and CT70-36 models is easily reversed in the field to a "check" position. Check valve holds back 15' (4.6 m/hd) of elevated water



CT70

CT70SS


CT70
Nozzles

CONSTRUCTION

- ◆ High-strength non-corrosive plastics and metals used throughout sprinkler
- ◆ Sealed, lubricant packed drive housing provides long life performance

OPTIONS (FACTORY INSTALLED)

- ◆ Non-potable cover (add "N" suffix)
- ◆ Vandal cover lock (add "XV" prefix)

ACCESSORIES

T3ST Nozzle install collar

DIMENSIONS

Height (closed): 8 13/16 (22.4 cm)

Pop-up Height: 4" (10.2 cm)

Inlet: 1" IPS (specify ISO for international)

Exposed Top Diameter: 1 3/4" (4.4 cm)

CT70 Specifications		International Model
Model	Type	
CT70	Adjustable arc	CT70-ISO
CT70-36	Full circle	CT70-36-ISO
CT70SS	Stainless steel, adjustable arc	CT70SS-ISO
CT70SS-36	Stainless steel, full circle	CT70SS-36-ISO

CT70 Performance

Nozzle	Pressure PSI	Radius* ft.	Flow gpm	Precip. in/hr ■	Precip. in/hr ▲	Pressure BAR	Radius* m	Metric Flow m³/hr	Precip. mm/hr ■	Precip. mm/hr ▲
71	40	49	8.1	0.65	0.75	2.8	14.9	1.84	17	19
	50	51	9.1	0.67	0.78	3.4	15.5	2.07	17	20
	60	53	10.0	0.69	0.79	4.2	16.2	2.27	17	20
	70	55	11.0	0.70	0.81	4.8	16.8	2.50	18	21
	80	56	11.8	0.72	0.84	5.5	17.0	2.68	18	21
72	50	54	10.7	0.71	0.82	3.4	16.5	2.43	18	21
	60	55	11.8	0.75	0.87	4.2	16.8	2.68	19	22
	70	57	12.6	0.75	0.86	4.8	17.4	2.86	19	22
	80	58	13.8	0.79	0.91	5.5	17.7	3.13	20	23
73	50	57	14.0	0.83	0.96	3.4	17.4	3.18	21	24
	60	58	15.3	0.88	1.01	4.2	17.7	3.48	22	26
	70	60	16.8	0.90	1.04	4.8	18.3	3.82	23	26
	80	61	17.8	0.92	1.06	5.5	18.6	4.04	23	27
74	60	59	16.6	0.92	1.06	4.2	18.0	3.77	23	27
	70	62	18.1	0.91	1.05	4.8	18.9	4.11	23	27
	80	63	19.2	0.93	1.08	5.5	19.2	4.36	24	27
	90	65	20.4	0.93	1.07	6.2	19.8	4.63	24	27
75	60	66	22.5	0.99	1.15	4.2	20.1	5.11	25	29
	70	67	24.7	1.06	1.22	4.8	20.4	5.61	27	31
	80	72	26.5	0.98	1.14	5.5	21.9	6.02	25	29
	90	74	28.0	0.98	1.14	6.2	22.6	6.36	25	29

Nozzle trajectory: 26°

*Radius of coverage shown is for still air with no diffusion. Maximum radius reduction with diffuser screw is 25%.

Note: Performance data derived from tests that conform to ASAE Standard S398.1.

Note: see page 65 for spacing and precipitation rate formulas.



STATEMENT OF TRADE WARRANTY

The Irrigation Professional's Protection Package from Weathermatic:

No hassles. No questions. Over-the-counter exchange.

10 Years	Black Max and Bronze Bullet Series valves and S24B solenoids
5 Years	Rotors, spray equipment, nozzles, Silver Bullet HP Series Valves and S20P solenoids
2 Years	Nitro Series Valves; SmartLine® and SmartLink products and all other catalogued products not specifically listed, or under the 5 or 10 year extended warranties. ProLine and SmartLine controllers, SLW weather stations and SmartLink products are covered under warranty for lightning damage.

All trade warranties are effective from the date code. The trade warranties extend only to the original professional installer of the Weathermatic products and do not extend to repairs, replacements or adjustments of Weathermatic products due to misuse, negligence, alteration, modification, tampering or improper installation and maintenance of the product and/or system. Contact your local Weathermatic authorized distributor for all warranty claims. Weathermatic's sole obligation is to repair or replace its products found to have defects in material or workmanship.

There are no other warranties, expressed or implied, including warranties of merchantability and fitness for a particular purpose. Weathermatic will not be liable to any party in strict liability, tort, contract or any other manner for damages caused or claimed to be caused as a result of any design or defect in Weathermatic's products, or any special incidental or consequential damages of any nature.

PRODUCT CHANGES

Weathermatic reserves the right to alter, modify or redesign its products, pricing and warranty at all times without creating any liability for the obsolescence of customer inventory of such parts or products.

ASAE CERTIFICATION STATEMENT

Weathermatic certifies that pressure, flow rate and radius data for these products were determined and listed in accordance with ASAE Standard S398.1, Procedure for Testing and Performance Reporting, and are representative of performance of production sprinklers at the time of publication. Actual product performance may differ from the published specifications due to normal manufacturing variations and sample selection.

GOVERNING LAW

The rights and obligations of the parties hereto, and any claims or disputes thereto, shall be governed by and construed in accordance with the laws of the State of Texas without reference to conflict of law principles.



PRODUCTS WITH PURPOSE



Make the
WATER FIRST Commitment
Learn more at: weathermatic.com/WATERFIRST



Weathermatic Headquarters
3301 W. Kingsley Rd.
Garland, TX 75041
1-888-484-3776
weathermatic.com

